

WAAS CH 86248 W28A	APP CRS 282°	Rwy Idg TDZE Apt Elev	3900 2242 2250
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 28

STANLEY MUNI (Ø8D)

RNP APCH - GPS.


▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. Rwy 28 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 5000 direct EWXUR and hold, continue climb-in-hold to 5000.

AWOS-3 121.1	MINNEAPOLIS CENTER 127.6 279.6	CTAF 122.9
------------------------	--	----------------------

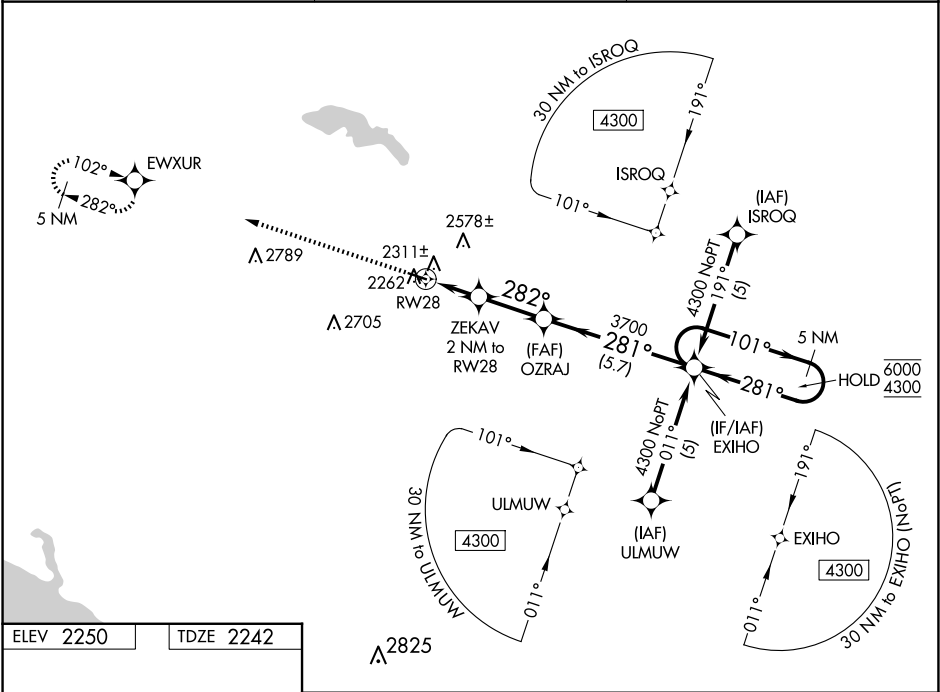

ELEV 2250

TDZE 2242

5000

EWXUR

ZEKAV

2 NM to RW28

OZRAJ

3700

EXIHO

5 NM Holding Pattern

0.9 NM to RW28

0.9

1.1 NM

2.5 NM

5.7 NM

3900 X 60

28

282°

GP 3.00°

TCH 40

CATEGORY	A	B	C	D
LPV DA	2492-1	250 (300-1)		NA
LNAV/VNAV DA	2492-1	250 (300-1)		NA
LNAV MDA	2580-1	338 (400-1)		NA
CIRCLING	2720-1 470 (500-1)	2940-1 690 (700-1)		NA

MRL Rwy 10-28