

WAAS CH 63221 W17A	APP CRS 168°	Rwy Ldg TDZE 5005 Apt Elev 5022
--	------------------------	---

RNAV (GPS) RWY 17

NEPHI MUNI (U14)


RNP APCH - GPS.

NA

Baro-VNAV NA when using Provo Muni altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -24°C or above 12°C. When local altimeter setting not received, use Provo altimeter setting: increase LPV DA to 5577 feet and visibility all Cats ½ SM, increase LNAV/VNAV DA to 5836 feet and visibility all Cats ½ SM; increase all MDAs 160 feet and LNAV and Circling visibilities Cats A/B ½ SM. Circling Cat C NA. VDP NA with Provo Muni altimeter setting.

MISSED APPROACH:
Climb to 11400 direct ACAGO and on track 191° to PILTE and hold.

AWOS-3PT 118.275	SALT LAKE CENTER 127.825 239.025	UNICOM 123.075 (CTAF) 0
----------------------------	--	-----------------------------------

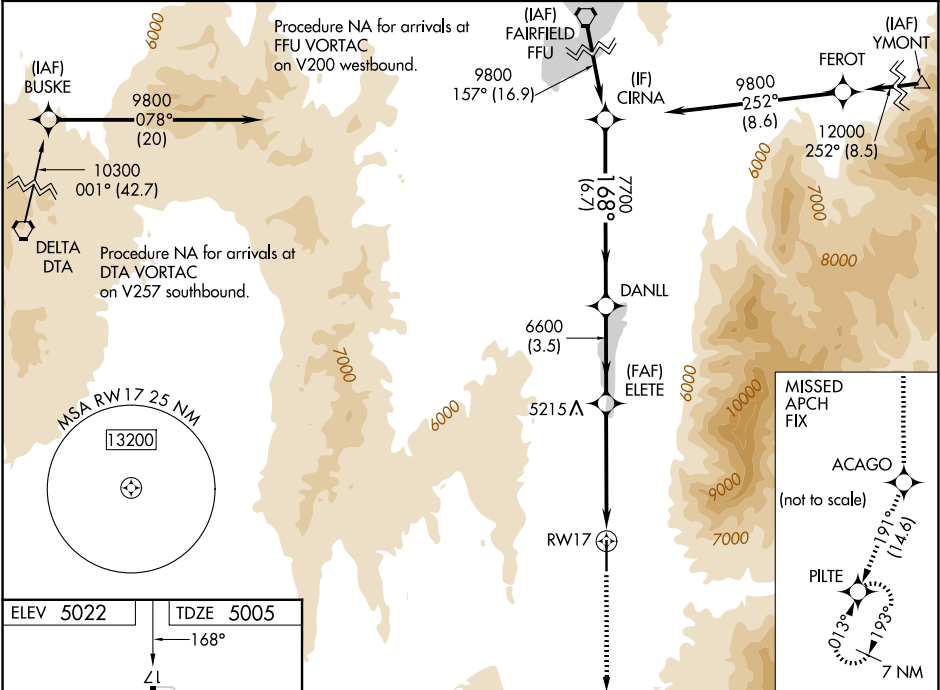

ELEV 5022

TDZE 5005

168°

ZL

0.6% Up

6300 X 100

35

MIRL Rwy 17-35

REIL Rwy 17 and 35

11400	ACAGO	tr 191°	PILTE	CIRNA			
*LNAV only.		*2.4 NM to RW17		ELETE	DANLL	168°	9800
RW17		6600		6600	7700	GP 3.00° TCH 40°	
2.4 NM		2.5 NM	3.5 NM	6.7 NM			
CATEGORY	A		B		C	D	
LPV DA	5433-1½				428 (500-1½)		
LNAV/ VNAV DA	5692-2½				687 (700-2½)		
LNAV MDA	5800-1 795 (800-1)		5800-1¼ 795 (800-1¼)		5800-2½		795 (800-2½)
CIRCLING	5800-1 778 (800-1)		5800-1¼ 778 (800-1¼)		6920-3 1898 (1900-3)		NA