

WAAS CH 82206 W15A	APP CRS 147°	Rwy Ldg 11820 TDZE 504 Apt Elev 504
--	------------------------	--

RNAV (GPS) RWY 15

GRIFFISS INTL (RME)

RNP APCH-GPS.

▼


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 48°C.

▲

When local altimeter setting not received, use Syracuse altimeter setting and increase LPV DA to 804 feet, LNAV/VNAV DA to 1152 feet and all MDA 100 feet. Increase LNAV/VNAV all Cats, LNAV Cats C and D and Circling Cats B and C visibility ¼ SM. Baro-VNAV and VDP NA when using Syracuse altimeter setting. Circling NA southwest of Rwy 15-33.

MISSED APPROACH: Climb to 3500 direct BOLTZ and hold.

ATIS 118.7	SYRACUSE APP CON 127.425 290.45	GRIFFISS TOWER ★ 118.1 (CTAF) 0 291.7	GND CON 121.9	UNICOM 122.95
----------------------	---	---	-------------------------	-------------------------

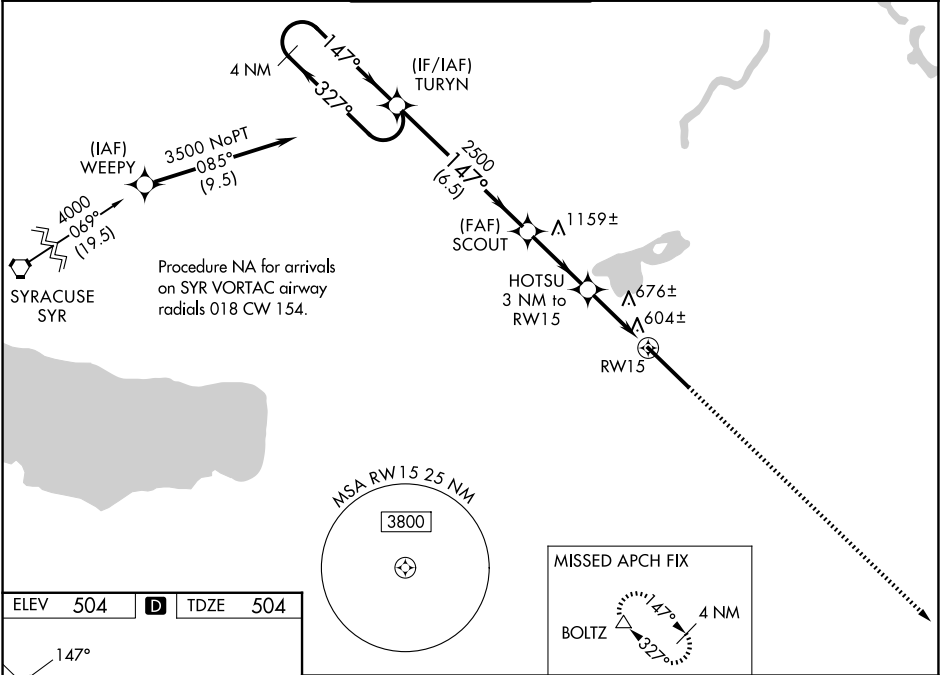

ELEV **504** **D** TDZE **504**

147°

GP 0.3% DOWN

11820 X 200

TWR

AS

33

HIRL Rwy 15-33 0

4 NM Holding Pattern				3500		BOLTZ ↑ △	