


WAAS CH 81936 W01A	APP CRS 007°	Rwy Idg 4199 TDZE 492 Apt Elev 492	RNAV (GPS) RWY 1 FINGER LAKES RGNL (ØG7)
--	------------------------	---	--


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Syracuse altimeter setting. Rwy 1 helicopter visibility reduction below ¾ SM NA. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Syracuse altimeter setting and increase all DA 86 feet and all visibility ¼ SM, increase all MDA 100 feet.

MISSED APPROACH: Climb to 1000 then climbing left turn to 3900 direct HADCI and hold, continue climb-in-hold to 3900.

AWOS-3 120.0	SYRACUSE APP CON 126.125 269.125	ROCHESTER APP CON 119.55 269.6 (W-NW)	ELMIRA APP CON ★ 124.3 257.8 (SW-SE)	UNICOM 122.8 (CTAF) Ø
------------------------	--	---	--	--

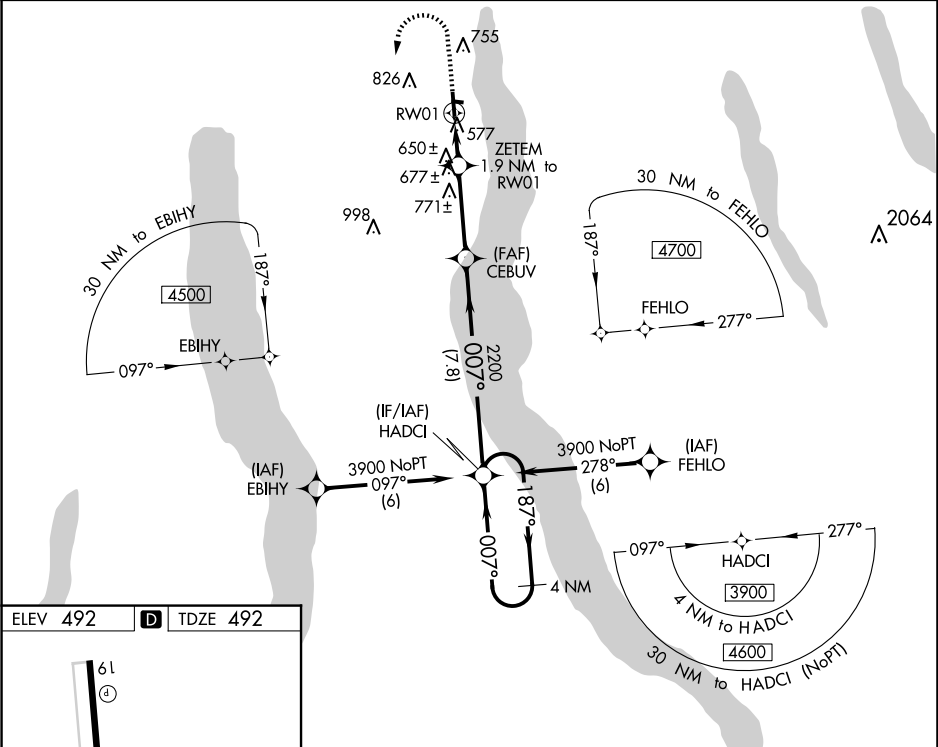

ELEV 492	D	TDZE 492
-----------------	----------	-----------------

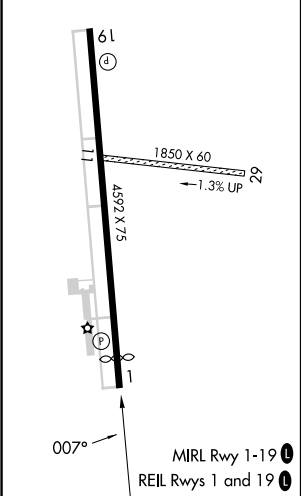

1000 ↑	3900 ↖	HADCI ✦	4 NM Holding Pattern 187° ← 007° 3900 GP 3.00° TCH 40			
* LNAV only		ZETEM 2200	CEBUV 2200	007°		
RW01 ↙		* 1.2 NM to RW01	1.9 NM to RW01	* 1120		2200
1.2 NM		0.7 NM	3.3 NM	7.8 NM		
CATEGORY	A		B		C	D
LPV DA	742-7 ⁸		250 (300-7 ⁸)		NA	
LNAV/ VNAV	959-15 ⁸		467 (500-15 ⁸)		NA	
LNAV MDA	900-1		408 (500-1)		NA	
CIRCLING	980-1 488 (500-1)		1180-1 688 (700-1)		NA	