


|                                        |                        |                                                                 |
|----------------------------------------|------------------------|-----------------------------------------------------------------|
| WAAS<br>CH <b>65740</b><br><b>W24A</b> | APP CRS<br><b>236°</b> | Rwy Idg <b>6001</b><br>TDZE <b>4237</b><br>Apt Elev <b>4265</b> |
|----------------------------------------|------------------------|-----------------------------------------------------------------|

RNAV (GPS) RWY 24  
SILVER SPRINGS (SPZ)

|  |                                                                                                                                                                                                                                      |                                                                                                                                                                                                              |
|--|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | <p>For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -23°C (-9°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Use Fallon NAS (Van Voorhis Fld) altimeter setting; when not received, use Reno/Tahoe Intl altimeter setting.</p> | <p>MISSED APPROACH: Climb to 6900 then climbing left turn to 9900 direct HZN VORTAC and hold, continue climb-in-hold to 9900.</p> <p>*Missed approach requires minimum climb of 315 feet per NM to 6900.</p> |
|--|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

|                          |                              |                                            |                       |
|--------------------------|------------------------------|--------------------------------------------|-----------------------|
| AWOS-2<br><b>120.475</b> | KNFL ATIS★<br><b>370.925</b> | NAVY FALLON APP CON<br><b>120.85 360.2</b> | CTAF<br><b>122.90</b> |
|--------------------------|------------------------------|--------------------------------------------|-----------------------|

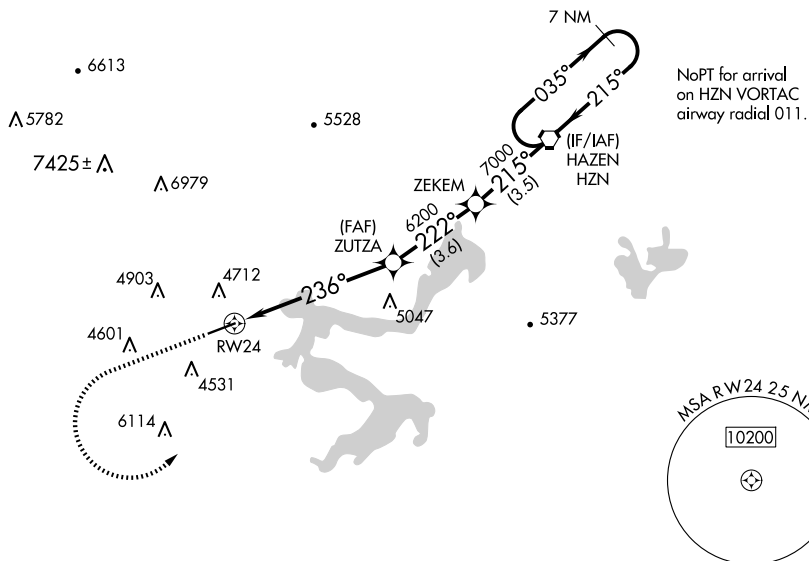

**Runway Data:**

| Category          | A                         | B                         | C                       | D  |
|-------------------|---------------------------|---------------------------|-------------------------|----|
| LPV DA*           | 4593-1¼                   | 356 (400-1¼)              |                         | NA |
| LPV DA            | 5007-3                    | 770 (800-3)               |                         | NA |
| LNAV/VNAV DA      | 5209-4                    | 972 (1000-4)              |                         | NA |
| LNAV MDA          | 5280-1¼<br>1043 (1100-1¼) | 5280-1½<br>1043 (1100-1½) | 5280-3<br>1043 (1100-3) | NA |
| <b>C</b> CIRCLING | 5280-1¼<br>1015 (1100-1¼) | 5620-1½<br>1355 (1400-1½) | 6040-3<br>1775 (1800-3) | NA |