

WAAS CH 86614 W34A	APP CRS 345°	Rwy Idg 4798 TDZE 3081 Apt Elev 3086
--	------------------------	---

RNAV (GPS) RWY 34
RONAN (7S0)


RNP APCH.

TANA


Baro-VNAV NA when using Missoula altimeter setting. For uncompensated Baro-VNAV systems, procedure NA below -21°C or above 54°C. Circling NA east of Rwy 16-34. When local altimeter setting not received, use Missoula altimeter setting and increase LPV DA to 3545 and all visibilities 3/4 SM, LNAV/VNAV DA to 3545 and all visibilities 3/4 SM; and increase all MDAs 120 feet.

MISSED APPROACH: Climb to 13000 direct PEKBE and on track 255° to QATQI and on track 209° to HANIM and hold, continue climb-in-hold to 13000.

AWOS-3 119.925	SALT LAKE CITY CENTER 127.075 244.875	AUNICOM 122.8 (CTAF) 0
--------------------------	---	----------------------------------

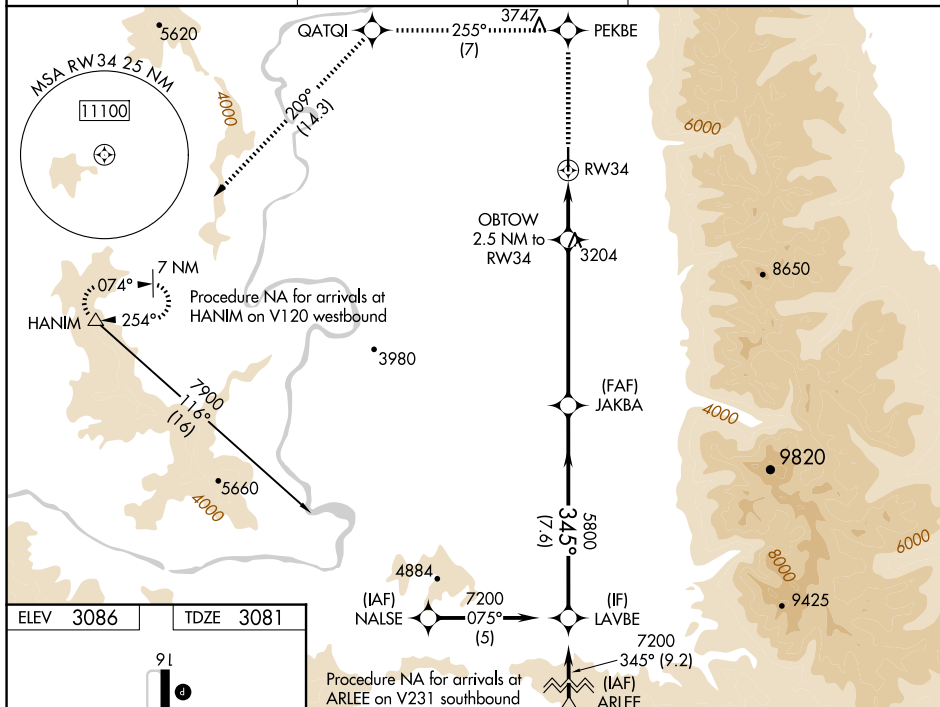

ELEV 3086		TDZE 3081
-----------	--	-----------

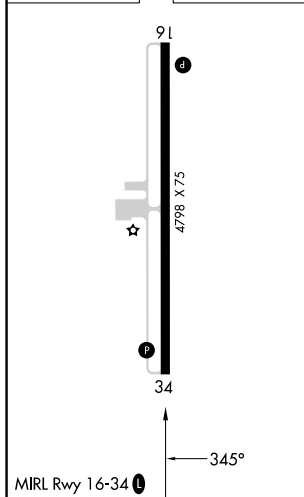

1 3000 ↑	PEKBE ✱	tr 255° ✱	QATQI tr 209° ✱	HANIM △	VGSJ and RNAV glidepath not coincident (VGSJ Angle 3.00/TCH 22).		LAVBE
*RNAV only							
CATEGORY	A	B	C	D			
LPV DA	3438-1	357 (400-1)	NA				
RNAV/ VNAV DA	3438-1¼	357 (400-1¼)	NA				
RNAV MDA	3520-1	439 (500-1)	NA				
C CIRCLING	3560-1	474 (500-1)	NA				

RNAV (GPS) RWY 34