

APP CRS
348°

Rwy Ldg	6004
TDZE	360
Apt Elev	364

RNAV (GPS) RWY 35
MOUNT PLEASANT RGNL (OSA)

MOUNT PLEASANT RGNL (OSA)



For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Paris altimeter setting and increase all DA/MDA 120 feet, increase LNAV/VNAV visibilities ½ mile all Cats, LNAV visibilities ¼ mile all Cats and circling visibilities ¼ mile all Cats. VDP and Baro-VNAV NA when using Paris altimeter setting.


MISSED APPROACH: Climb to 2000 direct AVORE and hold.

AWOS-3
119.775

FORT WORTH CENTER
132.025 317.75


UN|COM
122.7 (CTAF) **L**

Diagram showing a missed approach fix (APCH FIX) with a 4 NM distance, a 168° heading, and a 348° heading, with the word AVORE below.

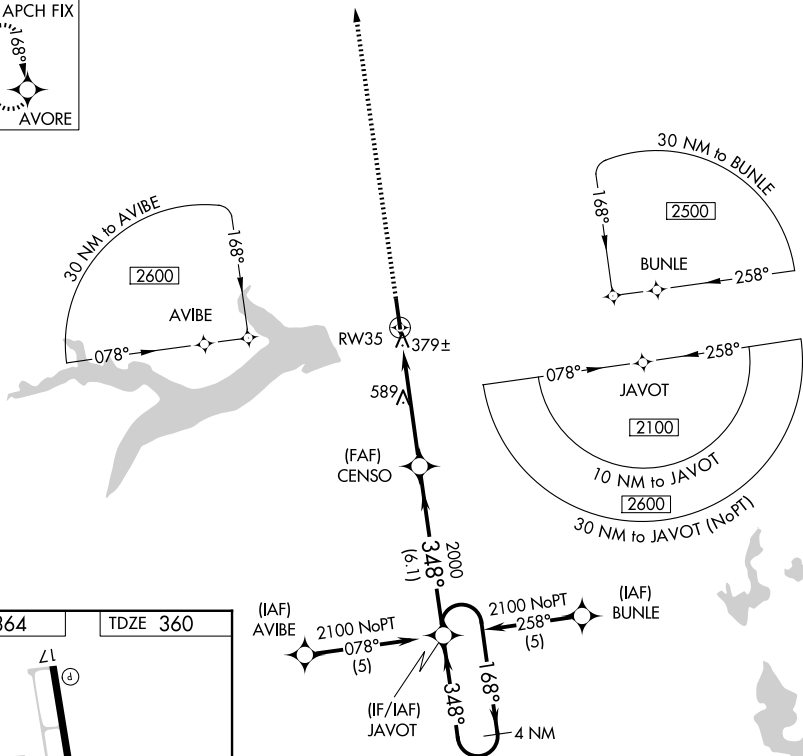

ELEV 364

TDZE 360

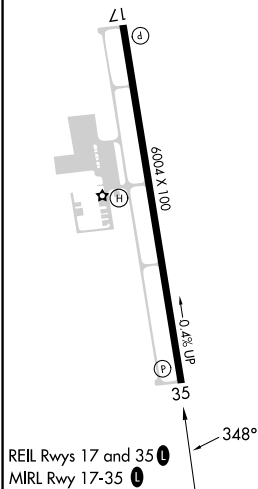

MOUNT PLEASANT, TEXAS
Amdt 1A 30DEC21

33°06'N-94°58'W

MOUNT PLEASANT RGNL (OSA)
RNAV (GPS) RWY 35

SC-2, 04 SEP 2025 to 02 OCT 2025

SC-2, 04 SEP 2025 to 02 OCT 2025

2000	AVORE				
CATEGORY	A	B	C	D	
RNAV/DA	700-1¼ 340 (400-1¼)				
RNAV MDA	900-1 540 (600-1)	900-1½ 540 (600-1½)	900-1¾ 540 (600-1¾)		
CIRCLING	900-1 536 (600-1)	1040-2 676 (700-2)	1040-2¼ 676 (700-2¼)		