


WAAS CH 42628 W07A	APP CRS 074°	Rwy Idg 5000 TDZE 1112 Apt Elev 1122
--	------------------------	---

RNAV (GPS) RWY 7
BELLEFONTAINE RGNL (FDJ)


NA For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 37°C (98°F). DME/DME RNP-0.3 NA. VDP and Baro-VNAV NA with James M. Cox Dayton Intl altimeter setting. When local altimeter setting not received, use James M. Cox Dayton Intl altimeter setting; increase LPV DA to 1456 feet, LNAV/VNAV DA to 1598 feet, and all MDAs 100 feet, and increase LPV and LNAV/VNAV all Cts visibility $\frac{1}{4}$ SM, LNAV Cts C and D visibility $\frac{3}{8}$ SM, and Circling Cat C visibility $\frac{1}{2}$ SM and Cat D visibility $\frac{1}{4}$ SM.

MISSED APPROACH: Climb to 1600 then climbing left turn to 3000 direct BUTYN and hold.

AWOS-3 118.075	COLUMBUS APP CON 134.45 294.5	UNICOM 122.8 (CTAF) 0
--------------------------	---	---------------------------------

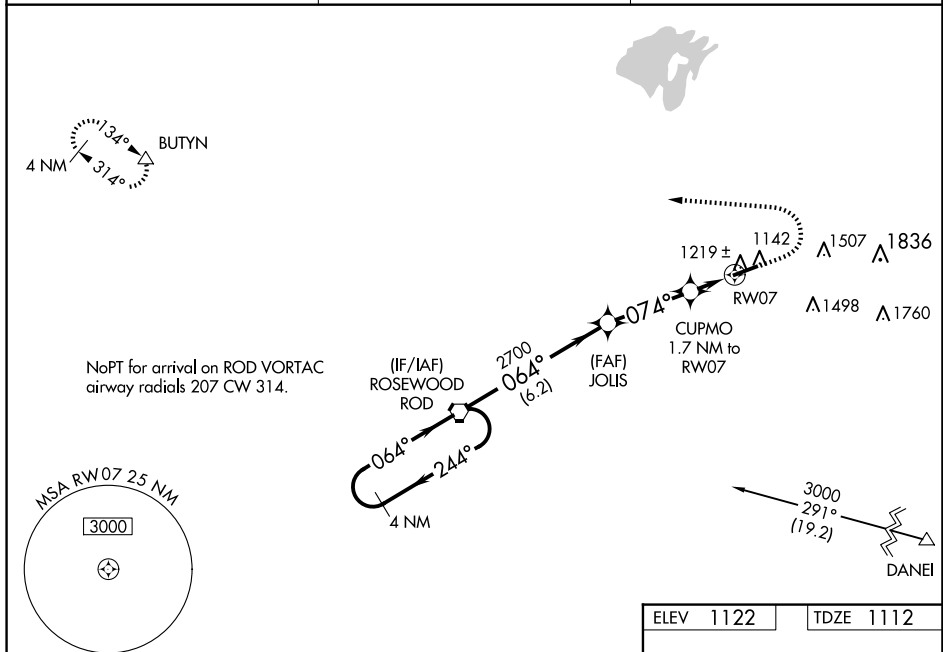

CATEGORY	A	B	C	D
LPV DA	1362- $\frac{7}{8}$	250 (300- $\frac{7}{8}$)		
RNAV/ VNAV DA	1504- $1\frac{3}{8}$	392 (400- $1\frac{3}{8}$)		
RNAV MDA	1480-1	368 (400-1)		
CIRCLING	1620-1 498 (500-1)	1640-1 518 (600-1)	1860-2 738 (800-2)	1980-2 $\frac{3}{4}$ 858 (900-2 $\frac{3}{4}$)

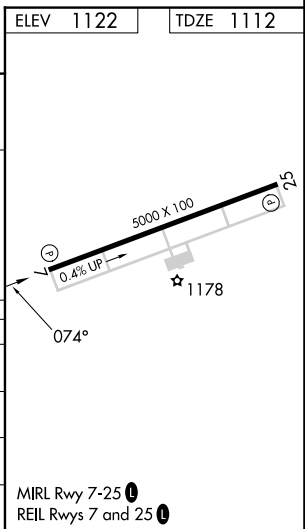

EC-2, 04 SEP 2025 to 02 OCT 2025

EC-2, 04 SEP 2025 to 02 OCT 2025