

WAAS
CH **82341**
W31A

APP CRS
313°

Rwy Idg
TDZE **1885**
Apt Elev **1885**

RNAV (GPS) RWY 31
ONIDA MUNI (98D)

▼


▲ NA

DME/DME RNP-0.3 NA. VDP NA when using Pierre altimeter setting. When local altimeter setting not received, use Pierre altimeter setting: increase all MDAs 80 feet and LP Cat C visibility ¼ SM and LNAV and Circling Cat C visibility ¼ SM.

MISSED APPROACH:
Climb to 4100 direct WUKVA and hold.

AWOS-2
122.9 (CTAF) 0

MINNEAPOLIS CENTER
125.1 269.1

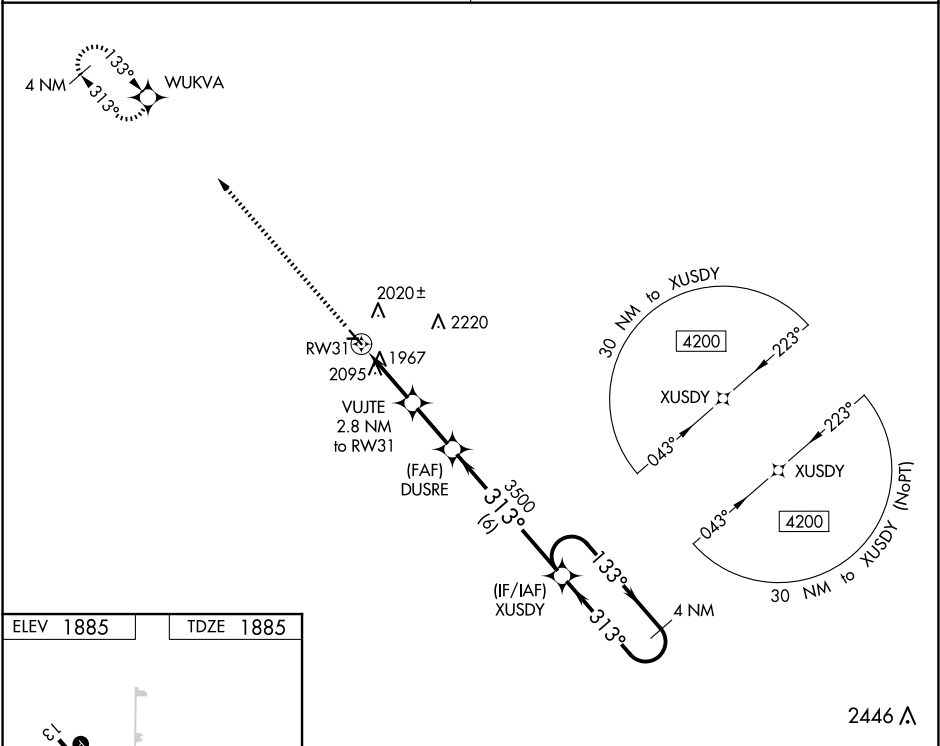

ELEV 1885

TDZE 1885

2160 X 120
0.3% UP

3800 X 60
0.6% UP

313° to RW31

4100 WUKVA

VUJTE 2.8 NM to RW31

DUSRE

XUSDY

4 NM Holding Pattern

1 NM to RW31

3.00° TCH 31

2800

3500

4200

1 NM 1.8 2.2 NM 6 NM

CATEGORY	A	B	C	D
LP MDA	2220-1 335 (400-1)			NA
LNAV MDA	2360-1	475 (500-1)	2360-1 ³ / ₈ 475 (500-1 ³ / ₈)	NA
CIRCLING	2400-1	515 (600-1)	2520-1 ³ / ₄ 635 (700-1 ³ / ₄)	NA

MIRL Rwy 13-31 0