

WAAS CH 93518 W16A	APP CRS 164°	Rwy Idg TDZE 2433 Apt Elev 2437
--	------------------------	---


RNAV (GPS) RWY 16

MADRAS MUNI (S33)

Baro-VNAV NA when using Redmond altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C (-2°F) or above 54°C (130°F). Rwy 16 helicopter visibility reduction below ¾ SM NA. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Redmond altimeter setting and increase all DA and MDA 580 feet; increase LPV all Cats visibility 2½ SM, LNAV/VNAV all Cats visibility 2½ SM, LNAV and Circling Cat A visibility ¼ SM, LNAV and Circling Cat B visibility ½ SM, and increase LNAV and Circling Cat C visibility ¼ SM.

MISSED APPROACH: Climb to 7000 direct HUKRI and on track 074° to JOREM and on track 042° to ZEMAB and hold.

AWOS-3PT 132.425	SEATTLE CENTER 126.15 269.475	UNICOM 122.8 (CTAF)
----------------------------	---	-------------------------------

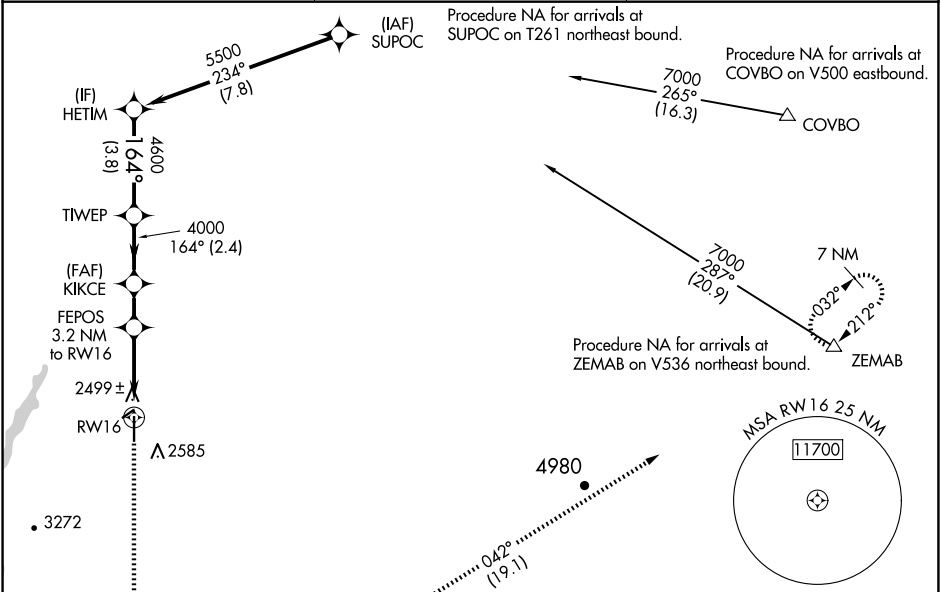

ELEV	2437	TDZE	2433
------	------	------	------

164°

2701 X 50

9 L

5091 X 75

34

REIL Rwy 34
MRL Rwy 16-34

GP 3.00° TCH 54	HETIM	5500	164°	TIWEP	4600	KIKCE	4000	FEPOS 3.2 NM to RW16	*3500	RW16	*LNAV only
CATEGORY	A	B	C	D							
LPV DA	2783-1½	350 (400-1½)									NA
LNAV/VNAV DA	2843-1¾	410 (500-1¾)									NA
LNAV MDA	3040-1	607 (700-1)	3040-1¾ 607 (700-1¾)								NA
CIRCLING	3040-1	603 (700-1)	3040-1¾ 603 (700-1¾)								NA