

LOC/DME I-BBG 111.35 Chan 50 (Y)	APP CRS 323°	Rwy Idg 7140 TDZE 1302 Apt Elev 1302
--	------------------------	---

ILS or LOC RWY 32
BRANSON (BBG)


NA

Inop table does not apply. When local altimeter setting not received, use Harrison altimeter setting and increase S-ILS 32 DA to 1549 feet; increase all MDAs 60 feet and S-LOC 32 visibility Cat C/D and Circling visibility Cat C ¼ SM. VDP NA when using Harrison altimeter setting.

MALSF

MISSED APPROACH: Climb to 4000 on heading 315° and HRO VOR/DME R-339 to WUTIB INT/HRO 25.3 DME and hold.

ATIS 124.625	SPRINGFIELD APP CON 126.35	BRANSON TOWER ★ 128.15 (CTAF) 0	GND CON 118.4	CLNC DEL 118.4	SPRINGFIELD CLNC DEL 126.35 (When tower closed)	UNICOM 122.95
------------------------	--------------------------------------	--	-------------------------	--------------------------	--	-------------------------

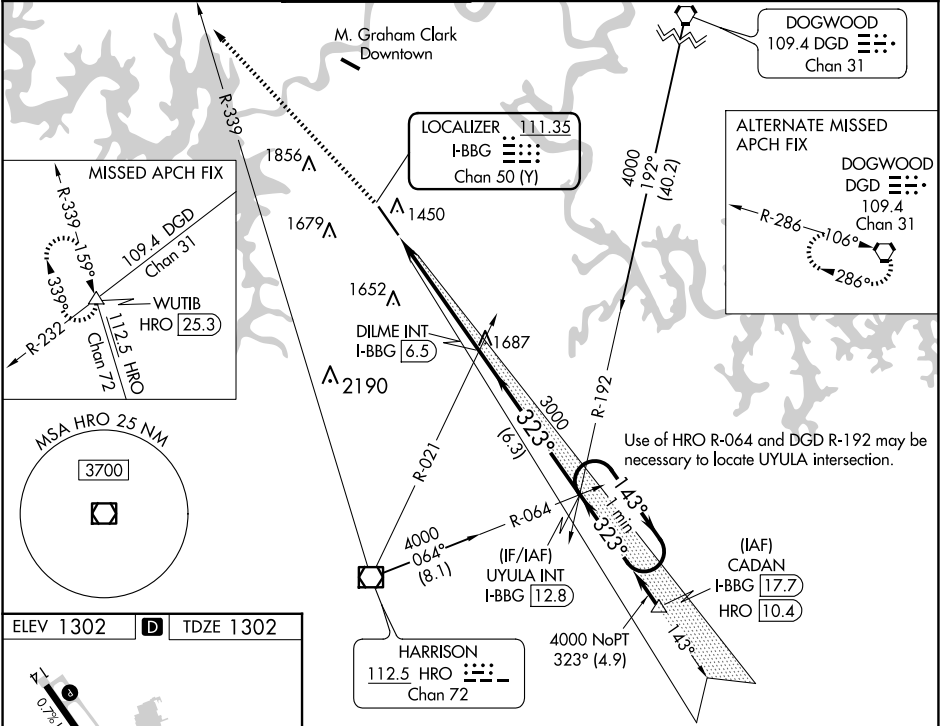

ELEV 1302 TDZE 1302

TWR ★

REIL Rwy 14

HIRL Rwy 14-32

FAF to MAP 5.1 NM

Knots	60	90	120	150	180
Min:Sec	5:06	3:24	2:33	2:02	1:42

4000 ↑ hdg 315°		HRO R-339	WUTIB △		UYULA INT I-BBG (12.8) One Minute Holding Pattern 143° → 4000 ← 323° 3000 323° 3000 I-BBG (1.4) I-BBG (2.7) DILME INT I-BBG (6.5) 3000 1.3 NM 3.8 NM 6.3 NM GS 3.00° TCH 50							
*LOC only.					*I-BBG (2.7)							
CATEGORY					A		B		C		D	
S-ILS 32					1502-1		200 (200-1)					
S-LOC 32					1760-1		458 (500-1)					
CIRCLING					1760-1 458 (500-1)		1900-1 598 (600-1)		2220-2¾ 918 (1000-2¾)		2220-3 918 (1000-3)	

NC-3, 04 SEP 2025 to 02 OCT 2025

NC-3, 04 SEP 2025 to 02 OCT 2025