

WAAS CH 87138 W13A	APP CRS 134°	Rwy Idg 4201 TDZE 1318 Apt Elev 1318
--	------------------------	---

RNAV (GPS) RWY 13

BLAIR EXEC (BTA)

⚠


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Eppley Airfield altimeter setting.

⚠


DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Eppley Airfield altimeter setting and increase LPV and LNAV/VNAV DA to 1642 and visibility to 1½ mile all Cats, increase all MDA 80 feet and LNAV Cat C visibility to 1¾ mile.

MISSED APPROACH: Climb to 4000 direct FALUK and hold.

AWOS-3 120.225	OMAHA APP CON 135.875 354.05	UNICOM 123.05 (CTAF) 0
--------------------------	--	----------------------------------

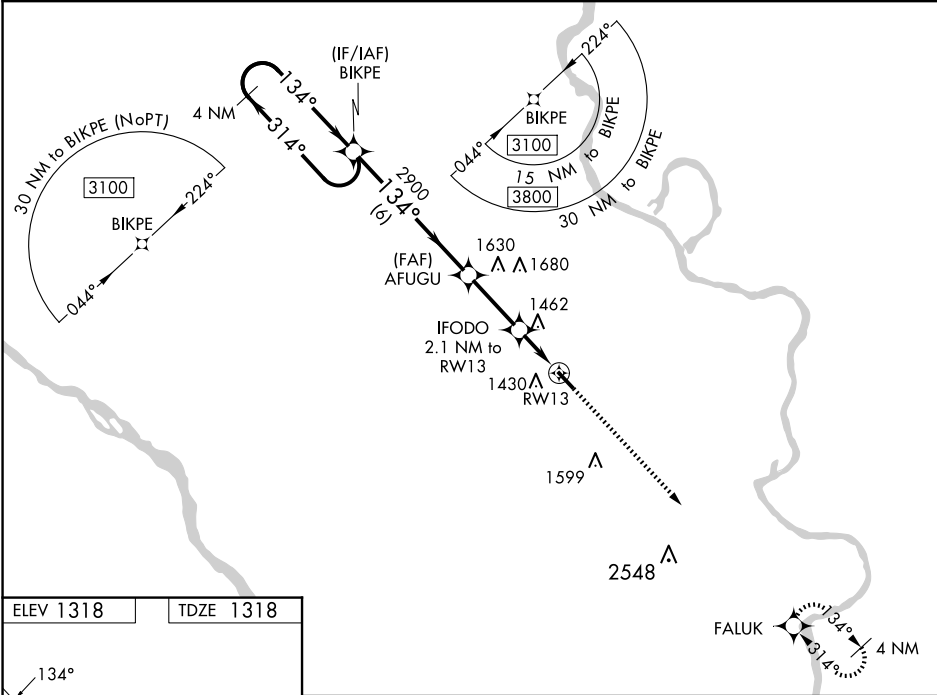

ELEV 1318	TDZE 1318
-----------	-----------

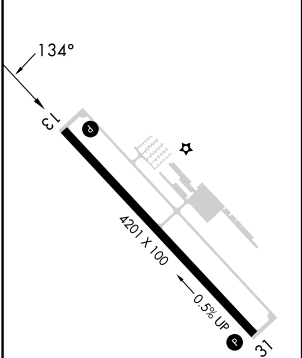

REIL Rwy 31 0
MIRL Rwy 13-31 0

4 NM Holding Pattern

BIKPE

AFUGU

IFODO 2.1 NM to RW13

FALUK

4000

*RNAV only

GP 3.00° TCH 40

2900

*2020

*1.1 NM to RW13

RW13

6 NM

2.7 NM

1 NM

1.1 NM

CATEGORY	A	B	C	D
LPV DA	1568-7/8	250 (300-7/8)		NA
LNAV/VNAV DA	1568-7/8	250 (300-7/8)		NA
LNAV MDA	1720-1	402 (500-1)	1720-1½ 402 (500-1½)	NA
CIRCLING	1740-1 422 (500-1)	1780-1 462 (500-1)	1780-2 462 (500-2)	NA