

WAAS CH 69447 W08A	APP CRS 083°	Rwy Ldg 5330 TDZE 5152 Apt Elev 5152
--	------------------------	---

RNAV (GPS) RWY 8

PINE BLUFFS MUNI (82V)

RNP APCH - GPS.


▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 54°C. Procedure NA at night.

MISSED APPROACH: Climb to 5800 then climbing right turn to 9300 direct SHOOP and hold, continue climb-in-hold to 9300.

AWOS-3PT 132.425	DENVER CENTER 125.9 284.7	UNICOM 122.8 (CTAF) 0
----------------------------	-------------------------------------	---------------------------------

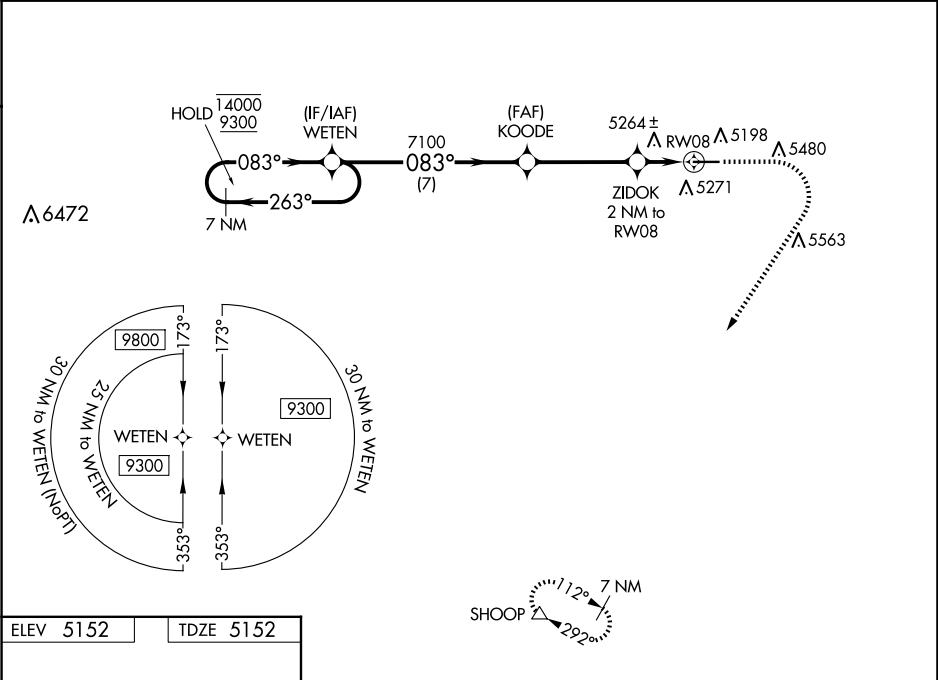

ELEV 5152	TDZE 5152
-----------	-----------

7 NM Holding Pattern

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 25).

5800 9300 SHOOP

GP 3.00° TCH 40

5330 X 75

0.4% UP

20°

083°

14000 9300

263° 083°

7100

083°

7100

5840

7 NM 4 NM 1 NM 1.1 NM

ZIDOK 2 NM to RW08

1.1 NM to RW08

RW08

CATEGORY	A	B	C	D
LPV DA	5402-1	250 (300-1)		NA
LNAV/VNAV DA	5531-1	379 (400-1)		NA
LNAV MDA	5520-1	368 (400-1)		NA
CIRCLING	5620-1 468 (500-1)	5680-1 528 (600-1)	5780-1¾ 628 (700-1¾)	NA