



WAAS CH 49246 W16A	APP CRS 157°	Rwy Idg TDZE 1729 Apt Elev 1730
--	------------------------	---

RNAV (GPS) RWY 16

WILDER (6E5)

RNP APCH - GPS. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. Rwy 16 helicopter visibility reduction below ¾ SM NA. Baro-VNAV and VDP NA when using MDS altimeter setting. When local altimeter setting not received, use MDS altimeter setting and increase LPV DA to 2055 feet; increase LNAV/VNAV DA to 2200 feet and all visibilities ½ SM. Increase all MDAs 80 feet.	MISSED APPROACH: Climb to 3600 direct JAPPY and hold.
---	---

AWOS-3P 118.15	MINNEAPOLIS CENTER 126.25 339.8	CTAF 122.90
--------------------------	---	-----------------------

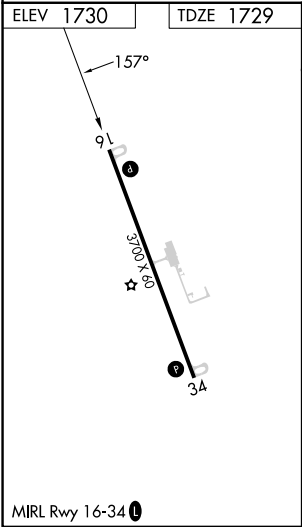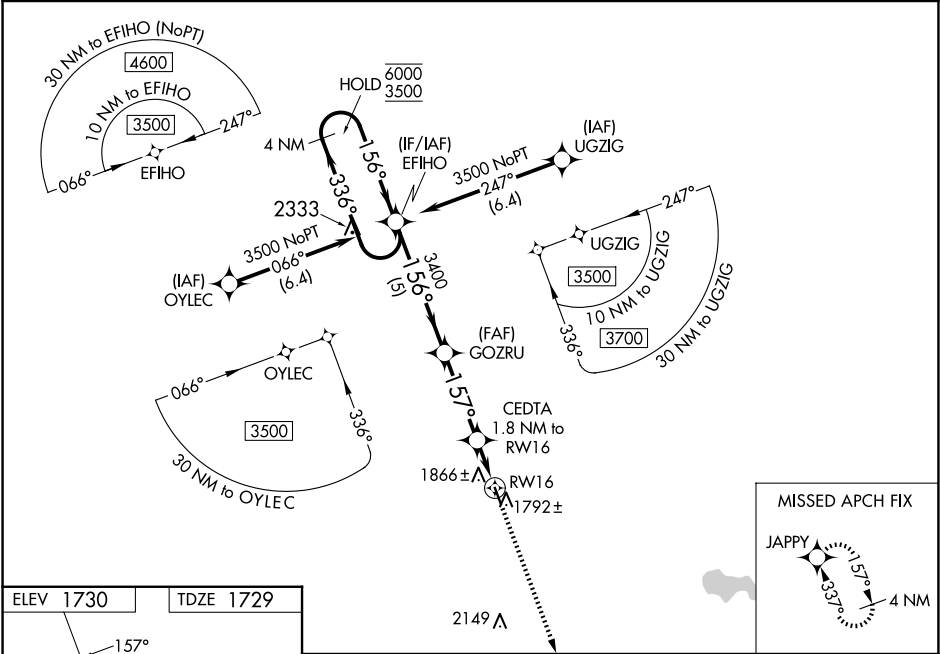

EFIHO 4 NM Holding Pattern 6000 ← 336° 3500 → 156° GP 3.00° TCH 34				GOZRU 3400 CEDTA 1.8 NM to RW16 1.1 NM to RW16 RW16 2340 5 NM 3.3 NM 0.7 1.1 NM				3600 JAPPY ↑ ✦
CATEGORY	A	B	C	D				
LPV DA	1979-1	250 (300-1)	NA					
LNAV/VNAV DA	2120-1½	391 (400-1½)	NA					
LNAV MDA	2120-1	391 (400-1)	NA					
CIRCLING	2180-1 450 (500-1)	2220-1 490 (500-1)	NA					