

WAAS CH 69531 W27A	APP CRS 276°	Rwy Ldg TDZE 2036 Apt Elev 2037
--	------------------------	---

RNAV (GPS) RWY 27

POPLAR MUNI (PO1)




⚠


NA

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C (-2°F) or above 54°C (130°F). DME/DME RNP -0.3 NA. When local altimeter setting not received, use Wolf Point altimeter setting: increase LPV DA to 2332, LNAV/VNAV DA to 2582 and all Cats visibility ¼ SM; increase all MDAs 60 feet and Circling Cat C/D visibility ¼ SM. Baro-VNAV and VDP NA with Wolf Point altimeter setting. Helicopter visibility reduction below 1 SM not authorized. Circling NA to Rwy 2/20.

MISSED APPROACH: Climb to 6000 direct ORMOW and on track 246° to DORIA and hold, continue climb-in-hold to 6000.

AWOS-3PT 135.325	SALT LAKE CITY CENTER 126.85 305.2	UNICOM 122.8 (CTAF) 1
----------------------------	--	---------------------------------

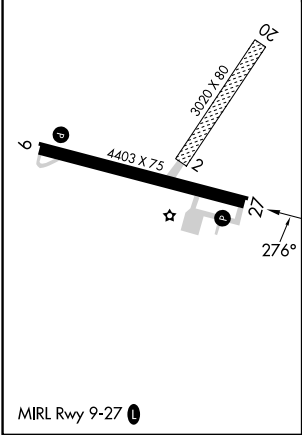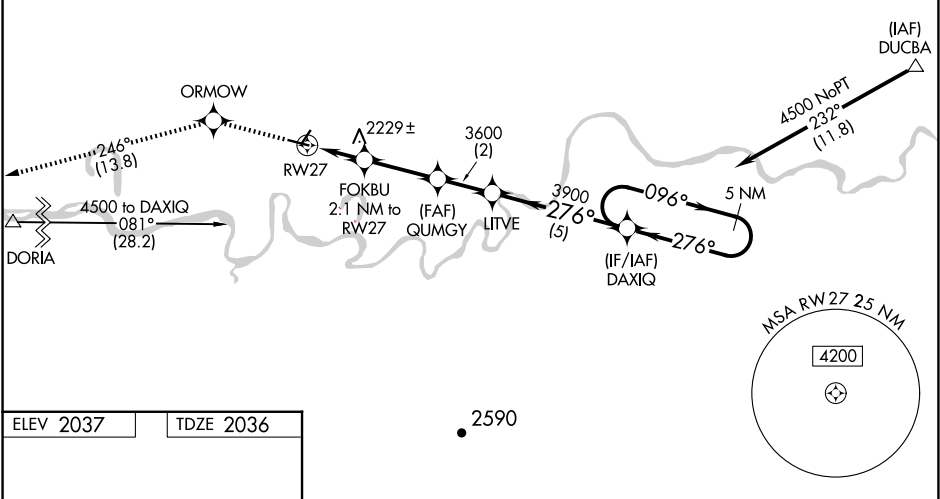

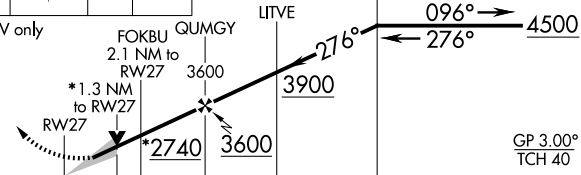6000	ORMOW	tr 246°	DORIA	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00°/TCH 24).					
									
*LNAV only									
CATEGORY									
LPV DA		A		B		C		D	
2286-1		250 (300-1)							
LNAV/VNAV DA		2536-1¾		500 (500-1¾)					
LNAV MDA		2480-1		444 (500-1)		2480-1⅜		444 (500-1⅜)	
2560-1		2600-1		2600-1½		2740-2¼			
523 (600-1)		563 (600-1)		563 (600-1½)		703 (800-2¼)			