


WAAS CH 86947 W30A	APP CRS 296°	Rwy Ldg 4200 TDZE 4321 Apt Elev 4328
--	------------------------	---


RNAV (GPS) RWY 30
STANFORD/BIGGERSTAFF FLD (S64)

RNP APCH - GPS.	Baro-VNAV NA. Rwy 30 helicopter visibility reduction below 1 SM NA. Circling NA to Rwy 7 and 25. Use LWT altimeter setting; when not received, use 19MT altimeter setting and increase LPV DA to 4718 feet and all visibilities ½ SM. Increase LNAV/VNAV DA to 4794 feet and all visibilities ½ SM. Increase all MDAs 60 feet and LNAV visibility Cat B ½ SM, and Circling visibility Cat B ½ SM. Procedure NA at night.	MISSED APPROACH: Climb to 4900 then climbing left turn to 8500 direct YOGOS and hold.
-----------------	--	---

LWT ASOS 118.375	SALT LAKE CENTER 133.4 285.4	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------

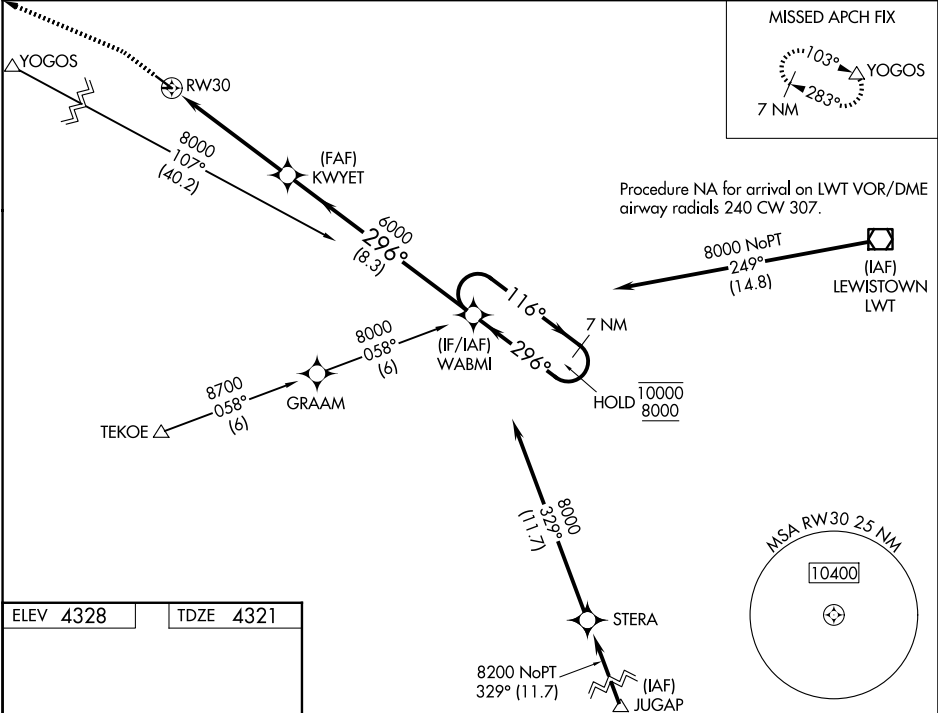

ELEV 4328	TDZE 4321
-----------	-----------

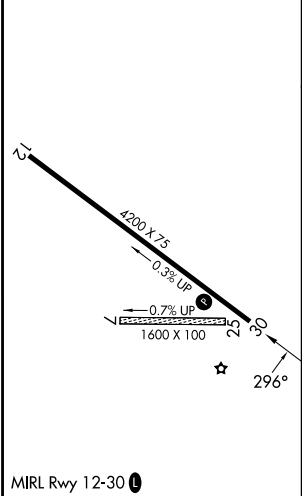

4900	8500	YOGOS	WABMI	7 NM Holding Pattern
↑	↶	△	6000	116° → 10000 ← 296° 8000
RW30		KWWYET	6000	GP 3.00° TCH 35
5.2 NM		8.3 NM		
CATEGORY	A	B	C	D
LPV DA	4667-1		346 (400-1)	
LNAV/VNAV DA	4743-1¼		422 (500-1¼)	
LNAV MDA	5020-1 699 (700-1)		5020-2 699 (700-2)	
CIRCLING	5020-1 692 (700-1)	5240-1¼ 912 (1000-1¼)	5600-3 1272 (1300-3)	5880-3 1552 (1600-3)