


WAAS CH 93844 W27A	APP CRS 267°	Rwy Idg TDZE 752 Apt Elev 752
--	------------------------	---

RNAV (GPS) RWY 27
BUFFALO-LANCASTER RGNL (BQR)

RNP APCH - GPS.	⚠ Rwy 27 helicopter visibility reduction below 1 SM NA. Baro-VNAV NA. ⚠ NA Use Buffalo Niagara Intl altimeter setting. Straight-in Rwy 27 at night, Circling Rwy 27 at night, operational VGSI required, remain on or above VGSI glidepath until threshold.	MISSED APPROACH: Climb to 1300 then climbing left turn to 3400 direct DMRIO and hold, continue climb-in-hold to 3400.
-----------------	--	---

BUF ASOS 135.35	BUFFALO APP CON 126.15 263.125	UNICOM 123.05 (CTAF) 0
---------------------------	--	----------------------------------

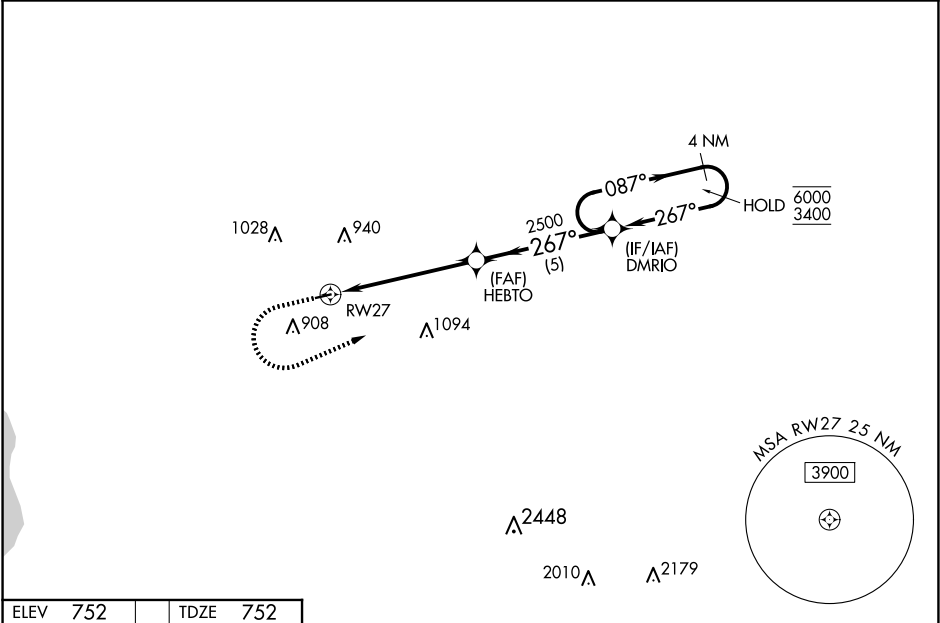

ELEV 752	TDZE 752
-----------------	-----------------

1300 3400 DMRIO

4 NM Holding Pattern

HEBTO 2500 DMRIO 087° 6000 267° 3400

RW27 2500 GP 3.00° TCH 40

5.4 NM 5 NM

CATEGORY	A	B	C	D
LPV DA	1070-1	318 (400-1)	NA	
LNAV/VNAV DA	1164-1½	412 (500-1½)	NA	
LNAV MDA	1320-1	568 (600-1)	NA	
CIRCLING	1320-1	568 (600-1)	NA	

MIRL Rwy 9-27 0

REIL Rwys 9 and 27 0