



WAAS CH 97737 W07A	APP CRS 068°	Rwy Ldg TDZE 966 Apt Elev 966
--	------------------------	---

RNAV (GPS) RWY 7


BLOYER FLD (Y72)

RNP APCH - GPS	Obtain local altimeter setting on CTAF, when not received, use CMY altimeter setting and increase all MDA's 20 feet, increase LNAV visibility Cat C 1/2 SM. Rwy 7 helicopter visibility reduction below 1 SM NA. Procedure NA at night.	MISSED APPROACH: Climb to 3000 direct GLAKE and hold.
----------------	--	---

VOLK APP CON ★ 135.25 244.875	VOLK CTAF 127.5	CTAF 122.9 0
---	---------------------------	------------------------

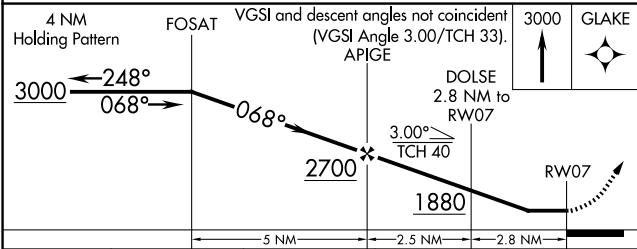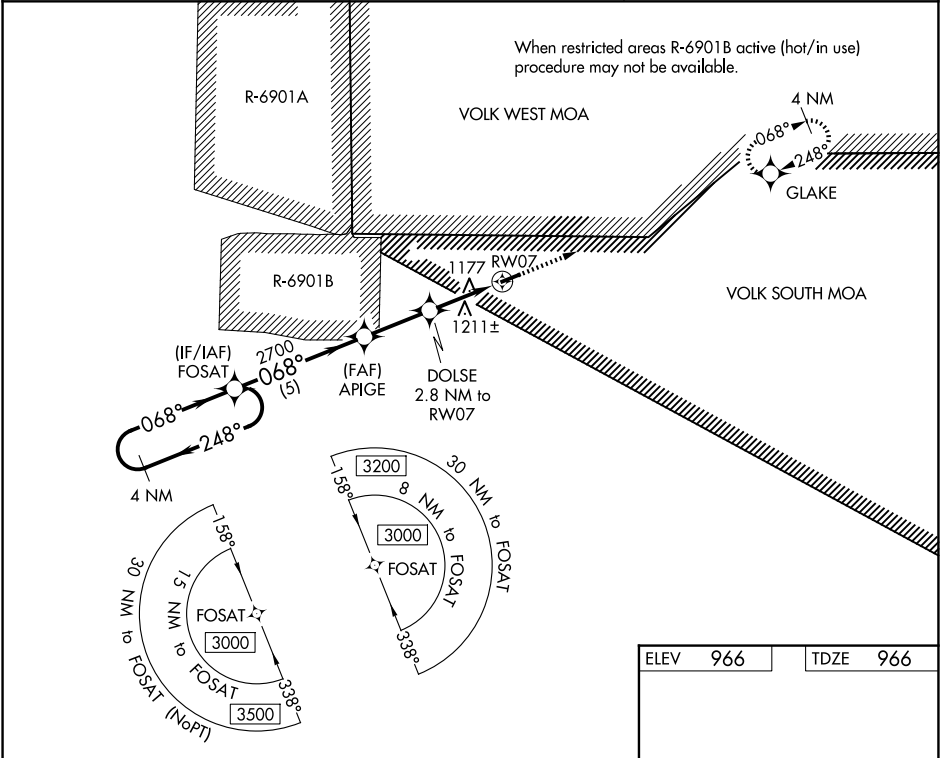

CATEGORY	A	B	C	D
LP MDA	1460-1	494 (500-1)	1460-1 3/8 494 (500-1 3/8)	NA
LNAV MDA	1500-1	534 (600-1)	1500-1 1/2 534 (600-1 1/2)	NA
CIRCLING	1540-1 574 (600-1)	1560-1 594 (600-1)	1660-2 694 (700-2)	NA

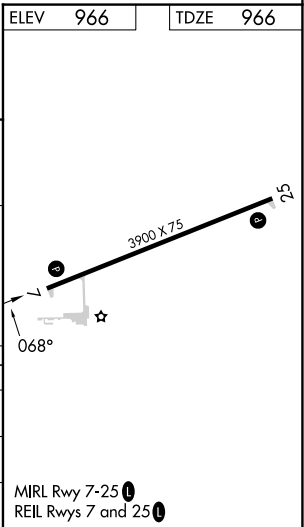

EC-3, 04 SEP 2025 to 02 OCT 2025

EC-3, 04 SEP 2025 to 02 OCT 2025