

WAAS CH 90146 W33A	APP CRS 333°	Rwy Idg TDZE Apt Elev	6001 6826 6878
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 33

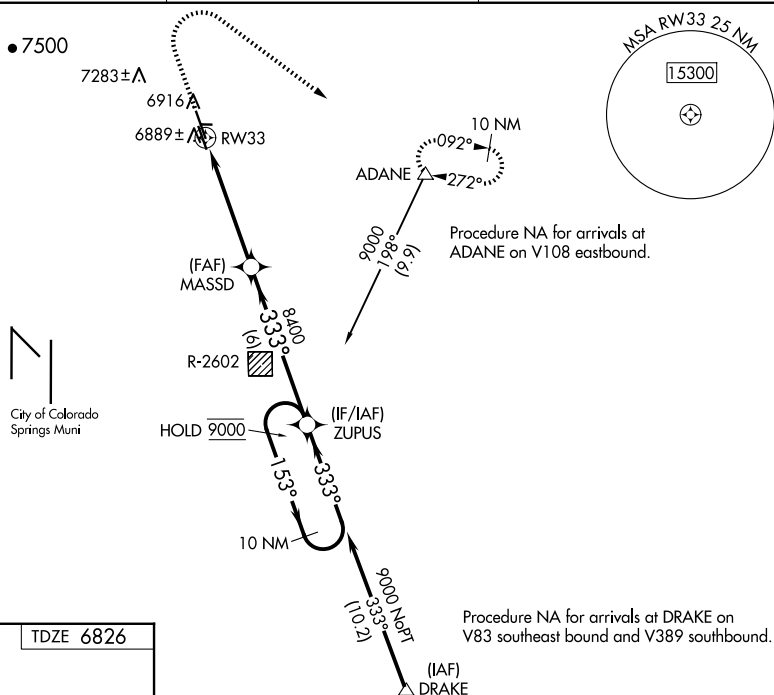
MEADOW LAKE (FLY)

RNP APCH - GPS.

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -28°C or above 54°C. Circling NA Rwy 16, 8, 26 and 34. Circling Rwy 15 NA at night. Circling NA southwest of Rwy 15-33.

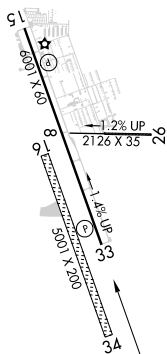
MISSED APPROACH: Climb to 7300, then climbing right turn to 9000 direct ADANE and hold, continue climb-in-hold to 9000.

AWOS-3PT
118.45

SPRINGS APP CON
124.0 257.875UNICOM
122.7 (CTAF) **L**

ELEV 6878

TDZE 6826

MIRL Rwy 15-33 **L**

REIL Rwys 15 and 33 L

The diagram illustrates the ZUPUS holding pattern. It shows a series of turns around a fix labeled 'ZUPUS'. The pattern consists of three segments: an initial inbound leg of 1 NM, followed by two outbound legs of 4 NM each, and a final inbound leg of 6 NM. The altitude at the fix is 8400 feet. The heading for the inbound leg is 333 degrees, and the heading for the outbound legs is 153 degrees. The diagram also shows the location of RW33 and the distance from the fix to RW33 (1 NM).