

|                                        |                        |                             |                                           |
|----------------------------------------|------------------------|-----------------------------|-------------------------------------------|
| WAAS<br>CH <b>82242</b><br><b>W17A</b> | APP CRS<br><b>173°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>5500</b><br><b>1409</b><br><b>1409</b> |
|----------------------------------------|------------------------|-----------------------------|-------------------------------------------|

RNAV (GPS) RWY 17

SIoux COUNTY RGnL (SXX)

RNP APCH.



▼

▲

Baro-VNAV and VDP NA when using Le Mars altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 34°C. When local altimeter setting not received, use Le Mars altimeter setting: increase DA 59 feet and all MDA 60 feet. Increase LNAV/VNAV all Cats visibility to ¾ SM and LNAV Cat C/D visibilities to ¾ SM.

MISSED APPROACH: Climb to 4500 direct SKYLE and hold.

|                           |                                            |                               |
|---------------------------|--------------------------------------------|-------------------------------|
| AWOS-3P<br><b>120.075</b> | SIoux CITY APP CON *<br><b>124.6 307.0</b> | UNICOM<br><b>122.7 (CTAF)</b> |
|---------------------------|--------------------------------------------|-------------------------------|

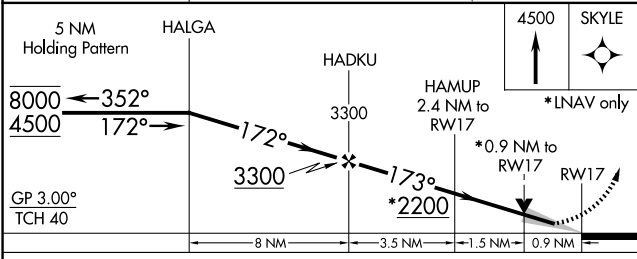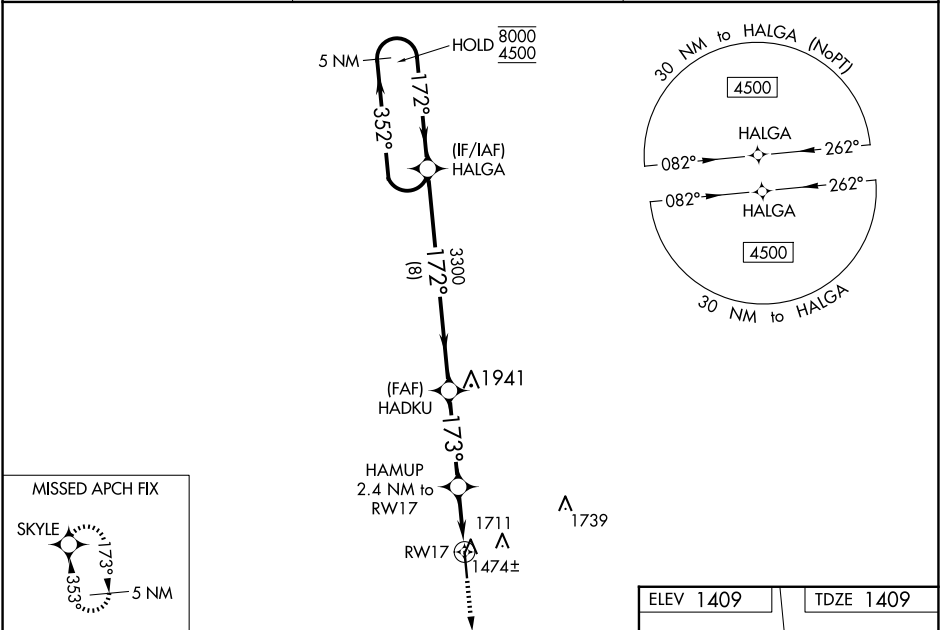

| CATEGORY     | A                     | B                     | C                     | D                       |
|--------------|-----------------------|-----------------------|-----------------------|-------------------------|
| LPV DA       |                       | 1609-¾                | 200 (200-¾)           |                         |
| LNAV/VNAV DA |                       | 1659-¾                | 250 (300-¾)           |                         |
| LNAV MDA     |                       | 1740-1                | 331 (400-1)           |                         |
| CIRCLING     | 1820-1<br>411 (500-1) | 2080-1<br>671 (700-1) | 2080-2<br>671 (700-2) | 2080-2¼<br>671 (700-2¼) |

