

WAAS CH 93742 W35A	APP CRS 353°	Rwy Idg TDZE 1409 Apt Elev 1409
--	------------------------	---

RNAV (GPS) RWY 35

SIoux COUNTY RGnL(SXX)

RNP APCH.

▼


Baro-VNAV and VDP NA when using Le Mars altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received; use Le Mars altimeter setting: increase DA 59 feet and all MDA 60 feet, increase LNAV visibility Cat C/D to ½ SM. For inop ALS, increase LNAV/VNAV all Cats visibility to ¾ SM, and LNAV Cat C/D visibility to ¾ SM. For inop ALS when using Le Mars altimeter setting increase LNAV/VNAV all Cats visibility to ¾ SM.


MALSR



MISSED APPROACH: Climb to 4500 direct HALGA and hold.

AWOS-3P 120.075	SIoux CITY APP CON ★ 124.6 307.0	UNICOM 122.7 (CTAF) 0
---------------------------	--	---------------------------------

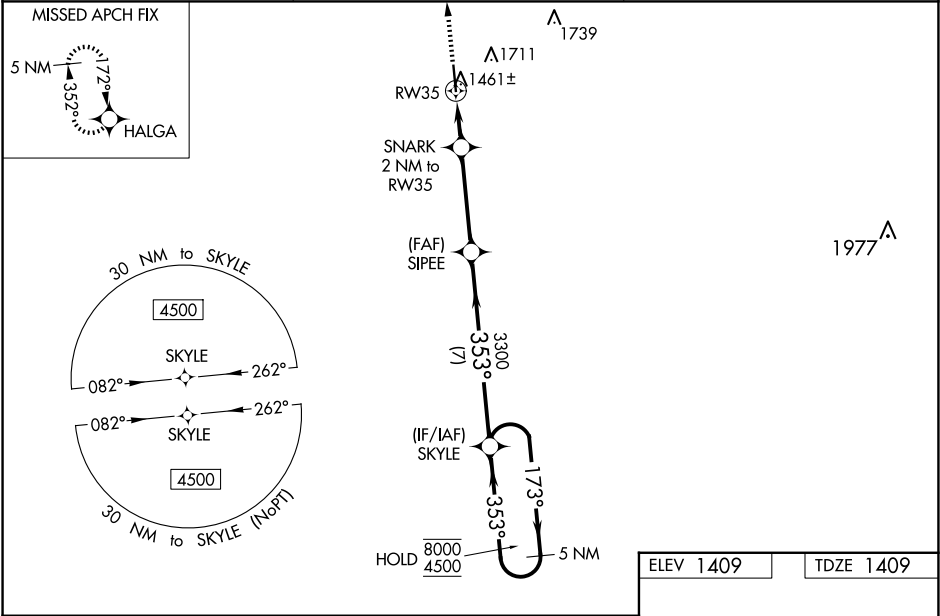

4500	HALGA				
*LNAV only		SNARK 2 NM to RW35	SIPEE 3300	SKYLE 5 NM Holding Pattern	
		2100*	3300	8000 4500	GP 3.00° TCH 40
CATEGORY	A	B	C	D	
LPV DA		1609-½	200 (200-½)		
LNAV/VNAV DA		1659-½	250 (300-½)		
LNAV MDA		1720-½	311 (400-½)		
CIRCLING	1820-1 411 (500-1)	2080-1 671 (700-1)	2080-2 671 (700-2)	2080-2¼ 671 (700-2¼)	

