

WAAS CH 78000 W05A	APP CRS 047°	Rwy Ldg TDZE 196 Apt Elev 196
--	------------------------	---

RNAV (GPS) RWY 5

SOUTHWEST GEORGIA RGNL (ABY)

RNP APCH.

▼

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C or above 54°C. For inop ALS, increase LNAV Cat D visibility to RVR 6000.


▲

** RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 2000 direct UNIKE and left turn on track 291° to PZD VOR/DME and hold.

ATIS 133.05	JACKSONVILLE CENTER 125.75 363.075	ALBANY TOWER ★ 120.25 (CTAF) 0336.4	GND CON 121.9 348.6	UNICOM 122.95
-----------------------	--	---	-------------------------------	-------------------------

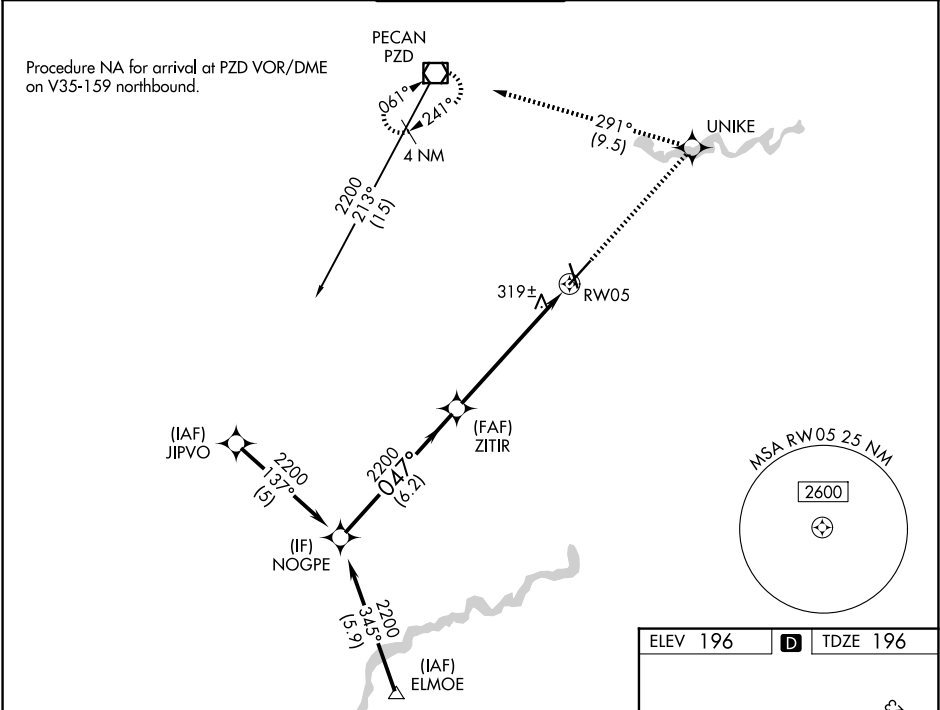

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 55).

NOGPE

ZITIR

2200

2200

2200

GP 3.00°

TCH 60

6.2 NM

5 NM

1 NM

2000

UNIKE

tr 291°

PZD

*1 NM to RW05

RW05

*LNAV only.

CATEGORY	A	B	C	D
LPV DA**	396/24 200 (200-½)			
LNAV/VNAV DA	635/50 439 (500-1)			
LNAV MDA	580/24 384 (400-½)		580/50 384 (400-1)	
CIRCLING	640-1 444 (500-1)	660-1 464 (500-1)	940-2¼ 744 (800-2¼)	940-2½ 744 (800-2½)

