

WAAS CH 56302 W19A	APP CRS 191°	Rwy Ldg 8500 TDZE 280 Apt Elev 285
--	------------------------	---

RNAV (GPS) Y RWY 19
ALBANY INTL (ALB)

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C (23°F) or above 54°C (130°F). For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500. Circling NA west of Rwy 1-19. Circling Rwy 10 NA at night.
A DME/DME RNP-0.3 NA.

MALSR

MISSED APPROACH: Climb to 3000 direct FLEIG and on track 196° to GROUP and hold.

D-ATIS 120.45	ALBANY APP CON 132.825 307.2	ALBANY TOWER 119.5 257.8	GND CON 121.7 348.6	CLNC DEL 127.50
-------------------------	--	------------------------------------	-------------------------------	---------------------------

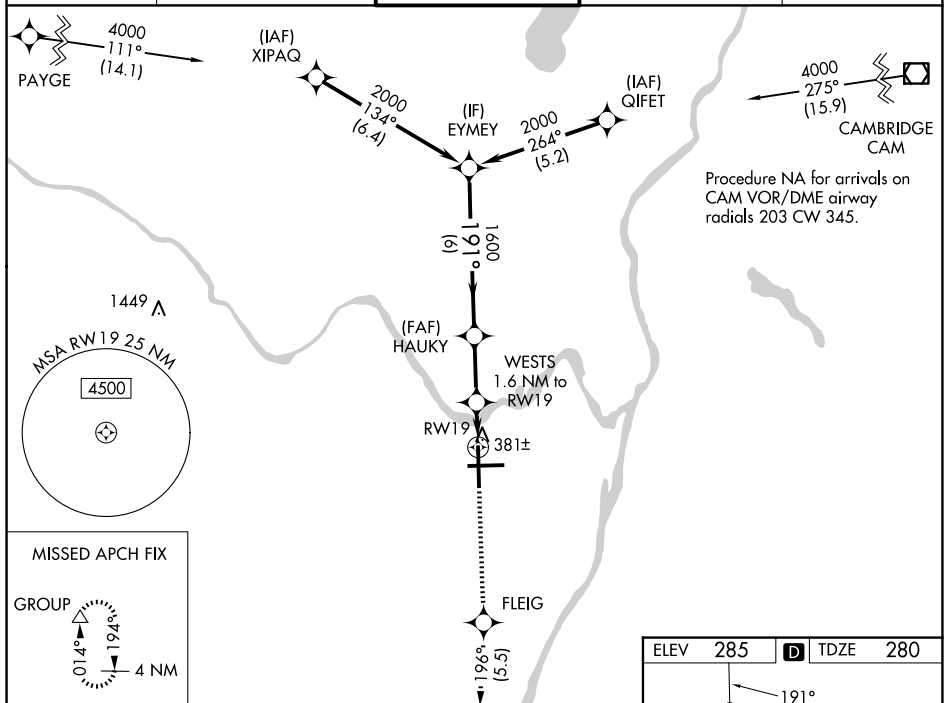


Diagram illustrating a 4-segment RNAV approach. Key data points include:

- EYMEY**: 2000
- HAU KY**: 1600
- WESTS**: 1.6 NM to RW19
- RW19**: 1.1 NM to RW19
- GP 3.00° TCH 54**
- 3000** (Altitude)
- 191°** (Heading)
- 196°** (Turn angle)
- LNNAV only**

CATEGORY	A	B	C	D
LPV DA		480/18	200 (200-½)	
LNAV/VNAV DA		590/24	310 (400-½)	
LNAV MDA	680/24	400 (400-½)	680/35	400 (400-¾)
CIRCLING	820-1	535 (600-1)	860-1½ 575 (600-1½)	960-2¼ 675 (700-2¼)

