

WAAS CH 61007 W31A	APP CRS 315°	Rwy Ldg 5099 TDZE 1423 Apt Elev 1425
--	------------------------	---

RNAV (GPS) RWY 31

ALEXANDRIA RGNL/CHANDLER FLD (AXN)

⚠ Inoperative table does not apply to LPV & LNAV/VNAV Cats A/B/C and LNAV Cat C. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 46°C (114°F). DME/DME RNP -0.3 NA. VDP and Baro-VNAV NA when using Glenwood altimeter setting. When local altimeter setting not received, use Glenwood altimeter setting and increase all DAs/MDAs 40 feet and increase LPV and LNAV/VNAV visibilities ¼ mile all Cats.

ODALS




MISSED APPROACH: Climb to 3500 direct
OCIWE and via 352° track to TILER and
hold.

ASOS
118.375


MINNEAPOLIS CENTER
126.1 269.2

UNICOM
123.0 (CTAF) **L**

MISSED APCH FIX

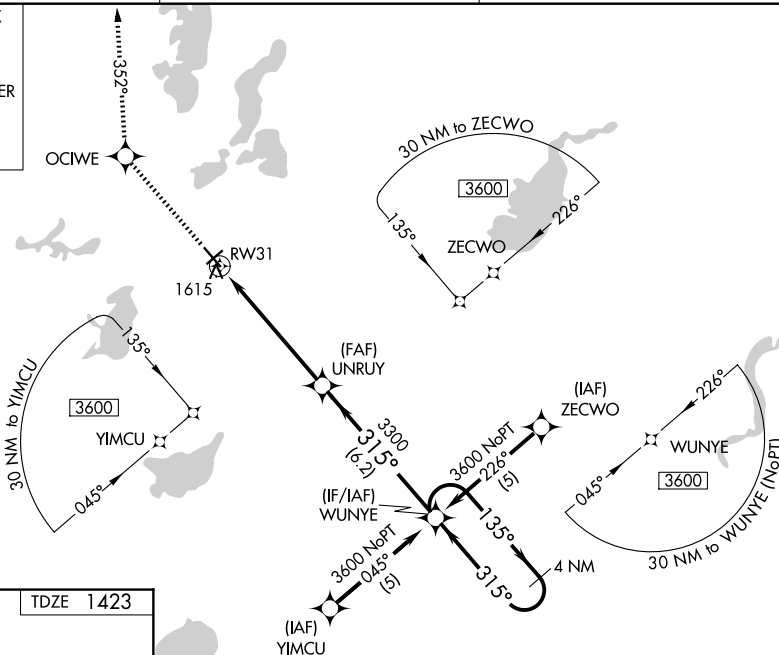

ELEV	1425
------	------

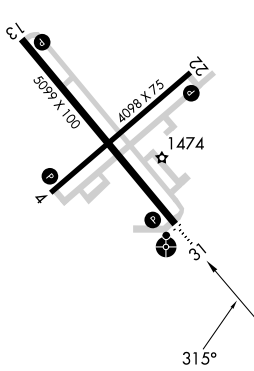 TDZE | 1 |REIL Rwy 4, 13, and 22 **L**

MIRI Rows 1-22 and 13-31 1

3500 		OCIWE 		tr 352°		TILER 		WUNYE 4 NM Holding Pattern	
*LNAV only.									
CATEGORY	A		B		C		D		
LPV DA	1815-1¼				392 (400-1¼)				
LNAV/VNAV DA	1885-1½				462 (500-1½)				
LNAV MDA	1880-¾	457 (500-¾)	1880-1¼ 457 (500-1¼)		1880-1½ 457 (500-1½)				
CIRCLING	1920-1	495 (500-1)	1940-1½ 515 (600-1½)		2000-2 575 (600-2)				

ALEXANDRIA, MINNESOTA

Amdt 1A 20MAY21

ALEXANDRIA RGNL/CHANDLER FLD (AXN)

45°52'N-95°24'W

RNAV (GPS) RWY 31