
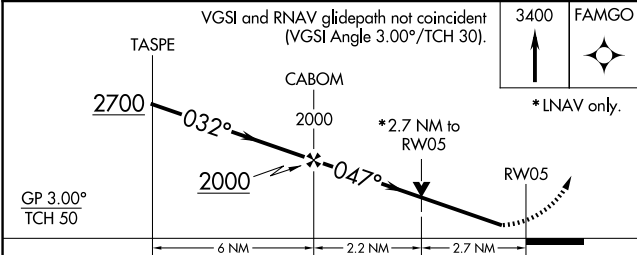


|                                        |                        |                             |                                         |
|----------------------------------------|------------------------|-----------------------------|-----------------------------------------|
| WAAS<br>CH <b>65842</b><br><b>W05A</b> | APP CRS<br><b>047°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>3800</b><br><b>411</b><br><b>422</b> |
|----------------------------------------|------------------------|-----------------------------|-----------------------------------------|

RNAV (GPS) RWY 5  
DANIEL FLD (DNL)

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                       |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| RNP APCH.<br><div><div>T</div><div>A</div></div> Baro-VNAV and VDP NA when using Augusta Rgnl at Bush Fld altimeter setting. Rwy 5 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter not received use Augusta Rgnl at Bush Fld altimeter setting: Increase LPV DA to 716 feet, LNAV/VNAV DA to 1496 feet and all MDA 60 feet; Increase LPV all Cats visibility ½ SM, LNAV Cat A and Circling Cat C visibility ¼ SM. | MISSED APPROACH: Climb to 3400 direct FAMGO and hold, continue climb-in-hold to 3400. |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|

|                        |                                         |                                  |
|------------------------|-----------------------------------------|----------------------------------|
| ASOS<br><b>135.275</b> | AUGUSTA APP CON ★<br><b>126.8 270.3</b> | UNICOM<br><b>123.05 (CTAF) 1</b> |
|------------------------|-----------------------------------------|----------------------------------|

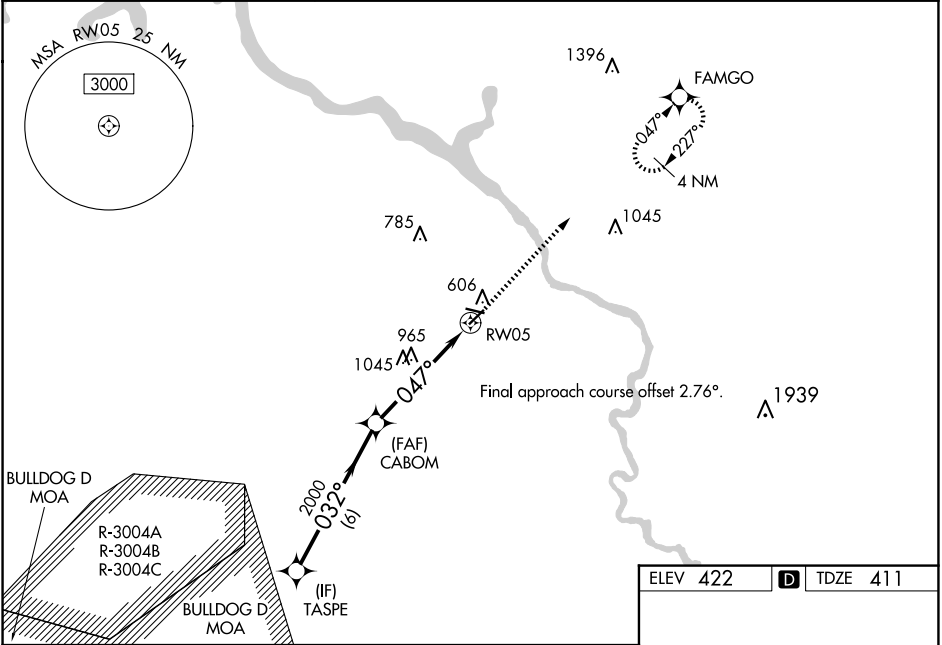

| CATEGORY     | A                     | B                       | C                        | D                      |
|--------------|-----------------------|-------------------------|--------------------------|------------------------|
| LPV DA       |                       | 661-¾                   | 250 (300-¾)              |                        |
| LNAV/VNAV DA |                       | 1441-4                  | 1030 (1100-4)            |                        |
| LNAV MDA     | 1280-1<br>869 (900-1) | 1280-1¼<br>869 (900-1¼) | 1280-2½<br>938 (1000-2¾) | 869 (900-2½)           |
| CIRCLING     | 1280-1¼               | 858 (900-1¼)            |                          | 1360-3<br>938 (1000-3) |

