

WAAS CH 50518 W32A	APP CRS 319°	Rwy Ldg TDZE 442 Apt Elev 459
--	------------------------	---

RNAV (GPS) RWY 32R

SCOTT AFB/MIDAMERICA ST LOUIS (BLV)

RNP APCH - GPS.


ASR

For uncompensated Baro-VNAV systems,
procedure NA below -18°C or above 54°C.
For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 5500.

MALSR

MISSED APPROACH: Climb to 2300 direct MADDT and right turn on track 078° to JIKMO and on track 145° to COFEY and hold.

ATIS 128.7 256.7	ST LOUIS APP CON 125.2 281.5	SCOTT TOWER 128.25 253.5	GND CON 199.2 275.8
----------------------------	--	------------------------------------	-------------------------------

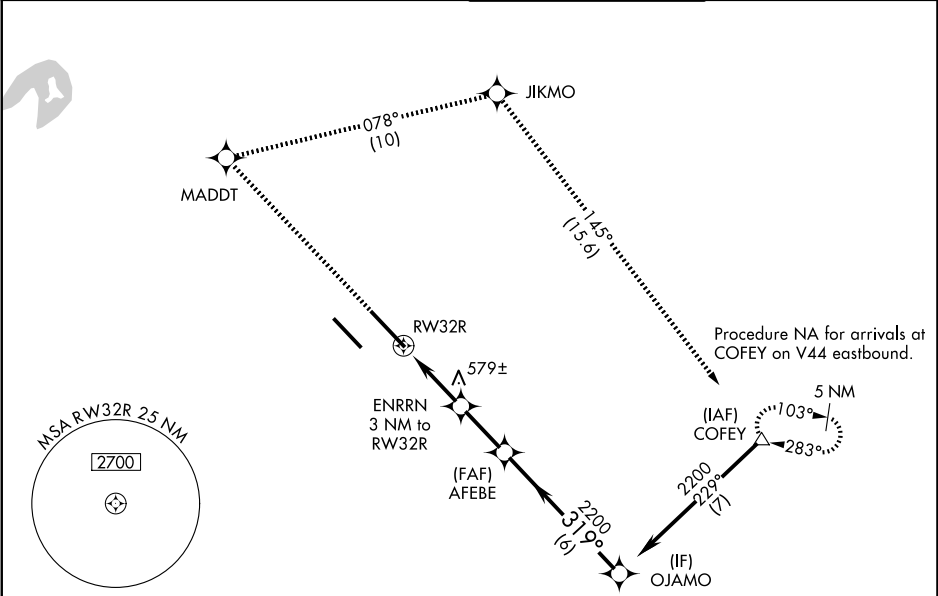

ELEV 459	D	TDZE 442								
			↑	✦	↷ tr 078°	✦	tr 145°	△		
			VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 71).							
			AFEBE 2200					OJAMO 2200		
			1 NM					2 NM	2.3 NM	6 NM
			CATEGORY					A	B	C
LPV DA			642/24 200 (200-½)							
LNAV/VNAV DA			804/35 362 (400-⅝)							
LNAV MDA			840/24 398 (400-½)			840/35 398 (400-⅝)				
CIRCLING			1000-1 541 (600-1)		1120-1 661 (700-1)		1240-2¼ 781 (800-2¼)		1240-2½ 781 (800-2½)	
REIL Rwy 14L HIRL Rwys 14R-32L and 14L-32R										