
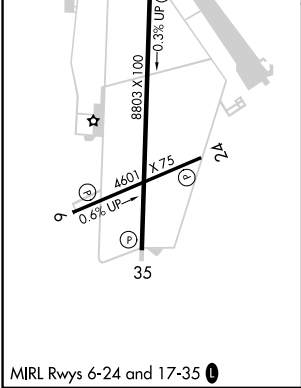


WAAS CH 97618 W17A	APP CRS 175°	Rwy Idg TDZE 8803 2562 Apt Elev 2573
--	------------------------	--

RNAV (GPS) RWY 17
BIG SPRING/MC MAHON-WRINKLE (BPG)

RNP APCH.	SSALS 	MISSED APPROACH: Climb to 4600 direct NEGCI and hold.
 Inop table does not apply to LNAV/VNAV and LNAV Cat C. When local altimeter setting not received, use Midland Intl Air and Space Port altimeter setting: increase all DA 130 feet and all MDA 140 feet; increase LPV and LNAV/VNAV all Cats and LNAV Cat C and D visibility ½ SM. Baro-VNAV NA when using Midland Intl Air and Space Port altimeter setting. VDP NA with Midland Intl Air and Space Port altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 43°C.		

AWOS-3PT 118.025	FORT WORTH CENTER 133.7 350.2	UNICOM 122.8 (CTAF) 0
----------------------------	---	---------------------------------

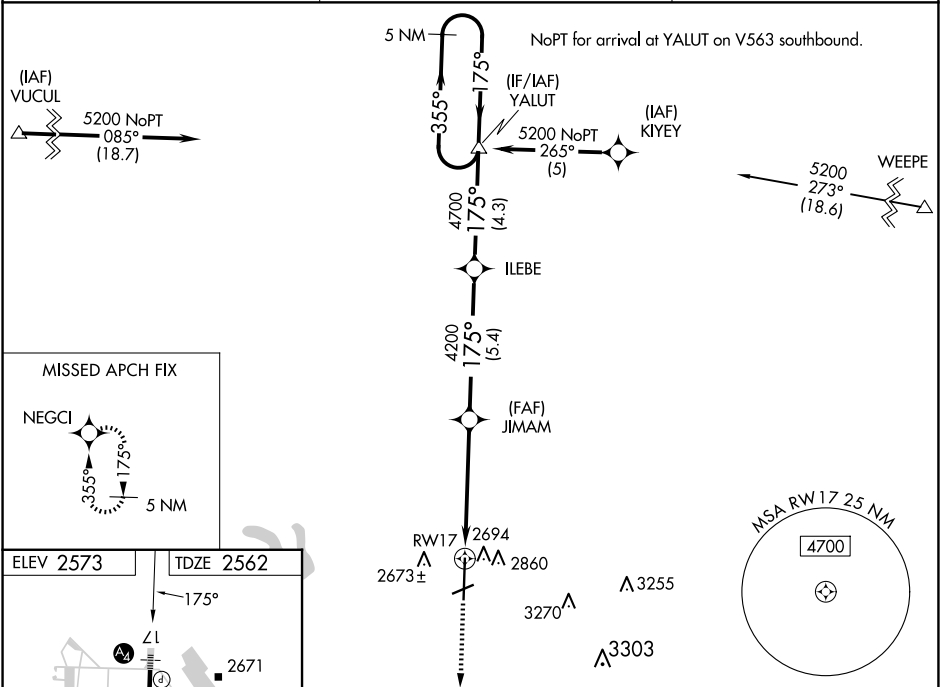

4600	NEGCI	5 NM Holding Pattern			
*LNAV only.		JIMAM	ILEBE	YALUT	
RW17		4200	4700	5200	
1.8 NM		3.2 NM	5.4 NM	4.3 NM	
CATEGORY	A	B	C	D	
LPV DA	2812-1 250 (300-1)				
LNAV/VNAV DA	3040-1¾ 478 (500-1¾)				
LNAV MDA	3160-¾ 598 (600-¾)		3160-1½ 598 (600-1½)		3160-1¾ 598 (600-1¾)

SC-2, 02 OCT 2025 to 30 OCT 2025

SC-2, 02 OCT 2025 to 30 OCT 2025