


BILOXI, MISSISSIPPI

ILS or LOC RWY 22

LOC I-BIX <u>109.7</u>	APCH CRS 217°	Rwy ldg 6630 THRE 17 Arpt Elev 33	[USAF]		KEESLER AFB (KBIX)	
RADAR or DME required			ALSIF-1	† MISSED APPROACH: Climb to 800 tracking 217°, upon reaching 800 turn left to intercept BIX TACAN R-186 climbing to 2200 to 11 DME (RUDLF) and hold.		
▼ * When ALS inop, increase CAT AB RVR to 55, vis to 1 mile, CAT CD vis to 1½ miles.						
ATIS ★ 281.55	GULFPORT APP CON ★ 124.6 354.1 (130°- 309°) 127.5 254.25 (310°- 129°)		TOWER ★ 120.75 269.075		GND CON ★ 121.8 275.8	CLNC DEL 121.8 275.8

• 272

† Missed approach requires use of RNAV or ATC RADAR monitoring.
Non-TACAN equipped aircraft expect ATC instructions.

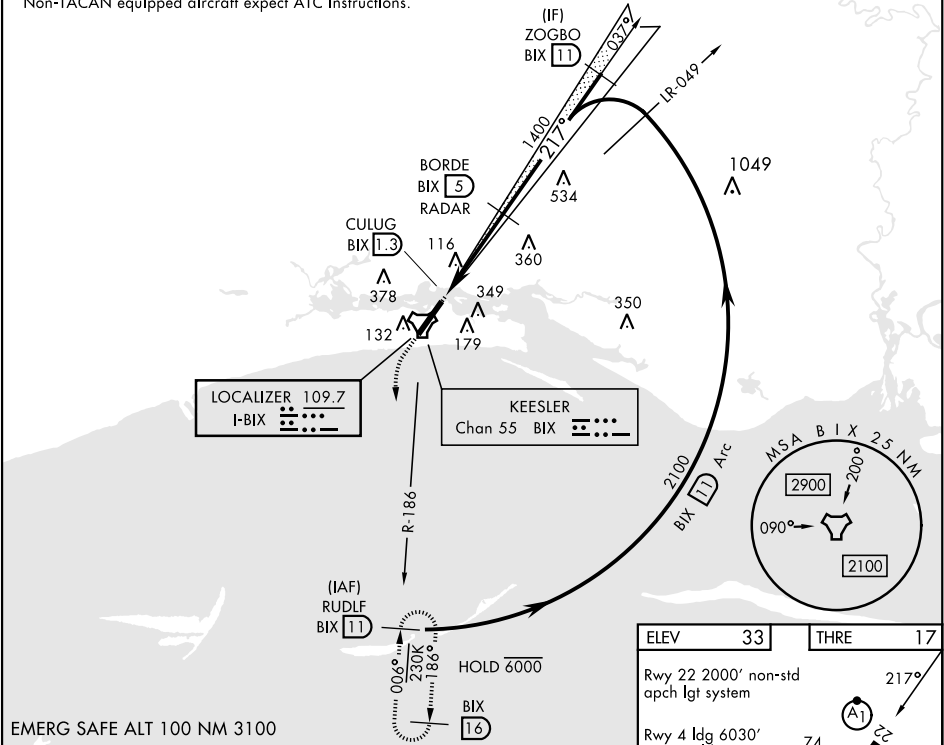

800

2200

RUDLF BIX 11

tr 217°

BIX R-186

BORDE BIX 5 RADAR 1400

ZOGBO BIX 11 2100

GP 3.00° TCH 53

BIX TACAN

CULUG BIX 1.3

BIX 2.3

0.5 3.7 NM

CATEGORY	A	B	C	D
S-ILS 22	217/40		200	(200-¾)
S-LOC 22*	540/40	523 (600-¾)	540-1¼	523 (600-1¼)
CIRCLING	580-1	660-1	680-1¾	680-2
	547 (600-1)	627 (700-1)	647 (700-1¾)	647 (700-2)

ELEV 33	THRE 17
Rwy 22 2000' non-std apch lgt system	
Rwy 4 ldg 6030'	
Rwy 22 ldg 6630'	
HIRL Rwy 4-22	
REIL Rwy 4	
175 74 45 74 195 195 195	
7300 150 7300 150 7300 150	
GP 3.00° TCH 53	
FAF to MAP 3.7 NM	
Knots	60 90 120 150 180
Min:Sec	3:42 2:28 1:51 1:29 1:14

BILOXI, MISSISSIPPI

30°25'N-88°55'W

KEESLER AFB (KBIX)

Amndt 2 03NOV22

ILS or LOC RWY 22

SC-4, 02 OCT 2025 to 30 OCT 2025

SC-4, 02 OCT 2025 to 30 OCT 2025