

TACAN RWY 22

TACAN BIX Chan 55	APCH CRS 222°	Rwy Idg 6630 THRE 17 Arpt Elev 33
-----------------------------	-------------------------	--

[USAF]

KEESLER AFB (KBIX)

T * When ALS inop, increase CAT AB RVR to 55, vis to 1 mile; CAT CD vis to 1¾ miles.


ALSF-1

† MISSED APPROACH: Climb to 800 tracking 215°, then turn left to intercept BIX R-186 to 11 DME (RUDLF) climbing to 2200 and hold.



ATIS★ 281.55	GULFPORT APP CON★ 124.6 354.1 (130°- 309°) 127.5 254.25 (310°- 129°)	TOWER★ 120.75 269.075	GND CON★ 121.8 275.8	CLNC DEL 121.8 275.8
-----------------	--	--------------------------	-------------------------	-------------------------

• 272


† Missed Approach requires use of RNAV or ATC RADAR monitoring.

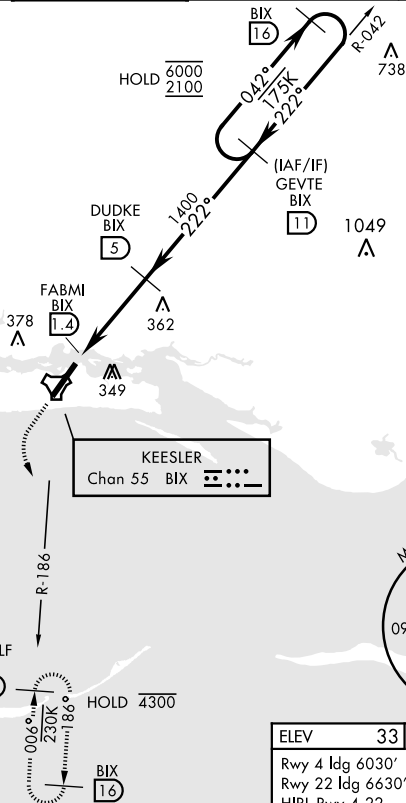

EMERG SAFE ALT 100 NM 3100

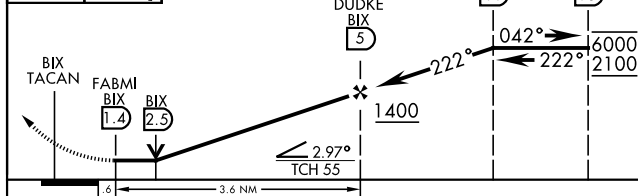

CATEGORY	A	B	C	D
S-22*	620/40 603 (600-34)		620-1½ 603 (600-1½)	
 CIRCLING	620-1 587 (600-1)	660-1 627 (700-1)	680-1¾ 647 (700-1¾)	680-2 647 (700-2)

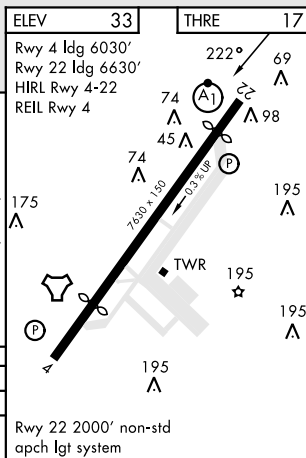

30°25'N-88°55'W

KEESLER AFB (KBIX)

Amdt 1 25MAR21

TACAN RWY 22