

WAAS CH 56419 W35A	APP CRS 353°	Rwy Idg 6099 TDZE 1238 Apt Elev 1258
--	------------------------	---


RNAV (GPS) RWY 35
FREDERICK RGNL (FDR)

RNP APCH-GPS.


A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 46°C. **A** Baro-VNAV and VDP NA when using Vernon altimeter setting. When local altimeter setting not received, use Vernon altimeter setting: increase LPV DA to 1478 feet; increase LNAV/VNAV DA to 1540 feet; increase all MDAs 40 feet and visibility LNAV Cat C ¼ SM and Circling Cat D ½ SM. Circling Rwy 3, 12, 17, 21, 30, NA at night.

MISSED APPROACH: Climb to 4000
direct JIVUG and right turn on track
083° to HUNBI and right turn on track
173° to HOTEX and right turn on track
263° to FAWCI and hold.

ASOS 132.675	ALTUS APP CON ★ 125.1 353.7	UNICOM 123.05 (CTAF) 0
------------------------	---------------------------------------	----------------------------------

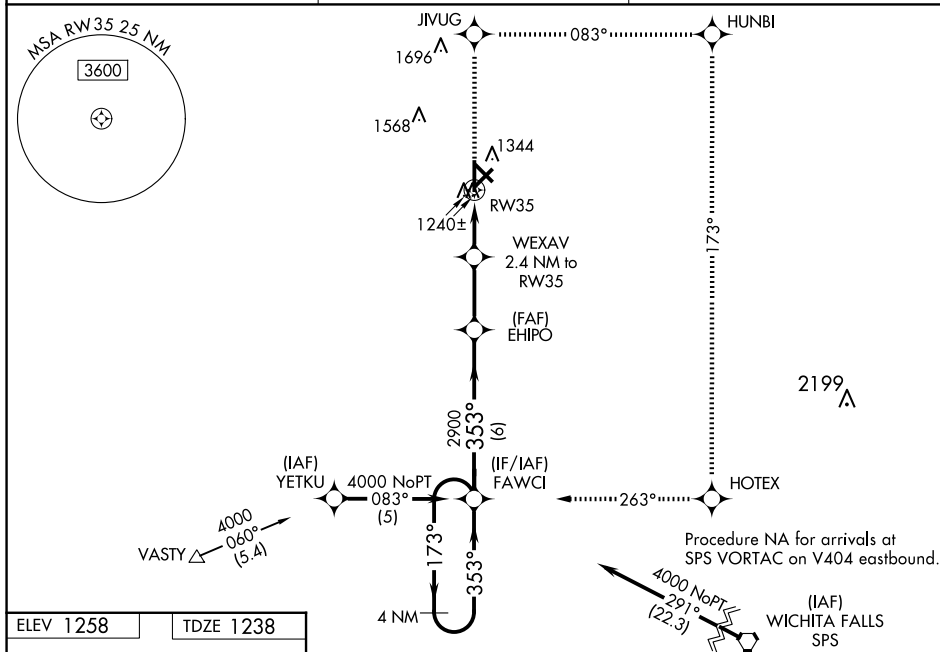

ELEV 1258		TDZE 1238
-----------	--	-----------

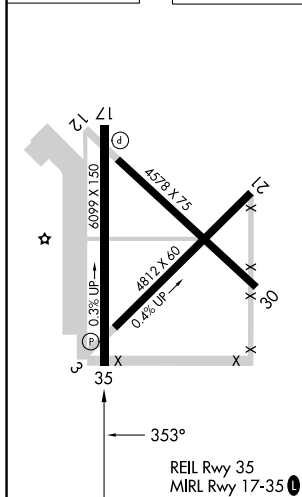

4000 ↑	JIVUG ↗	HUNBI ↗	HOTEX ↗	FAWCI ↗
	tr 083°	tr 173°	tr 263°	

4 NM Holding Pattern

173° → 4000

← 353°

GP 3.00° TCH 40

1 NM to RW35

2040

2900

1 NM 1.4 NM 2.6 NM 6 NM

CATEGORY	A	B	C	D
LPV DA		1438- ³ / ₄	200 (200- ³ / ₄)	
LNAV/VNAV DA		1500-1	262 (300-1)	
LNAV MDA		1600-1	362 (400-1)	1600-1 ¹ / ₄ 362 (400-1 ¹ / ₄)
CIRCLING	1700-1 442 (500-1)	1720-1 462 (500-1)	1880-1 ³ / ₄ 622 (700-1 ³ / ₄)	1900-2 642 (700-2)