
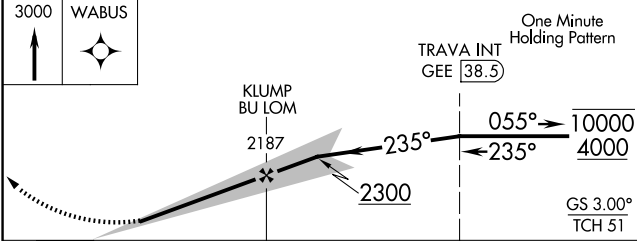


LOC I-BUF 111.3	APP CRS 235°	Rwy Idg TDZE Apt Elev 7569 726 727
---------------------------	------------------------	--

ILS or LOC RWY 23

BUFFALO NIAGARA INTL (BUF)

DME required. RNP APCH - GPS. ADF required for LOC only.				ALSIF-2		MISSED APPROACH: Climb to 3000 direct WABUS and hold.	
For inop ALS, increase S-LOC 23 Cats C and D visibility to RVR 6000.							
D-ATIS 135.35	BUFFALO APP CON 126.15 263.125		BUFFALO TOWER 120.5 257.8		GND CON 133.2 257.8	CLNC DEL 124.7 257.8	CPDLC

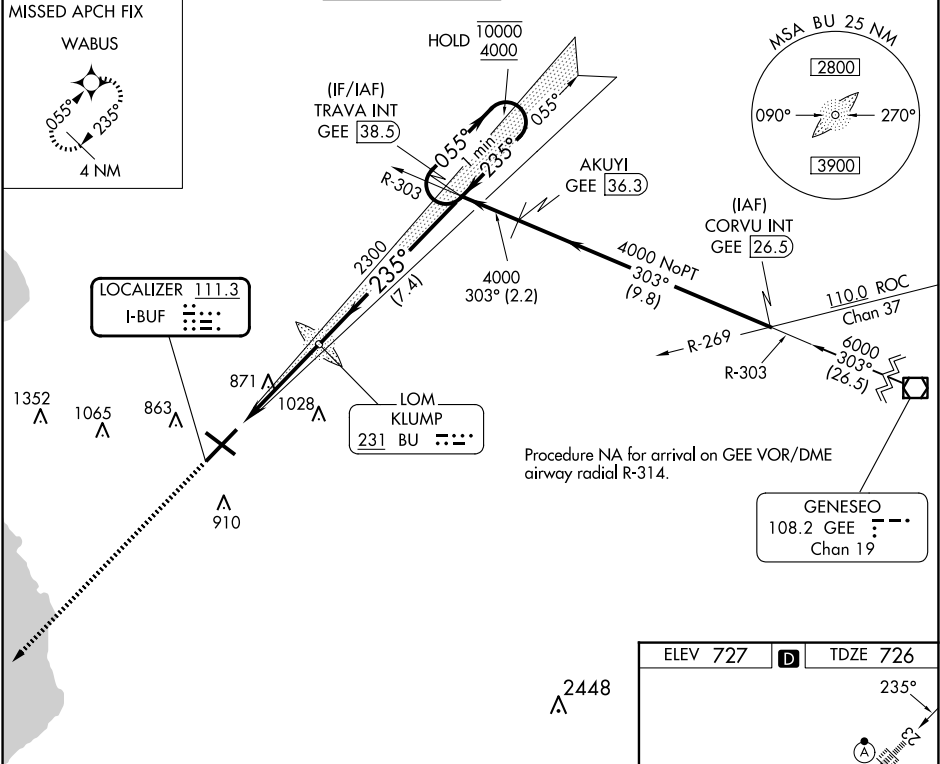

CATEGORY	A	B	C	D
S-ILS 23	926/18 200 (200-½)			
S-LOC 23	1140/24	414 (500-½)	1140/40	414 (500-¾)
CIRCLING	1200-1	473 (500-1)	1220-1½ 493 (500-1½)	1340-2 613 (700-2)

