

LOC I-GBI 108.5	APP CRS 055°	Rwy Idg TDZE Apt Elev	7569 708 727
---------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 5
BUFFALO NIAGARA INTL (BUF)




RADAR required for procedure entry. RNP APCH - GPS. ADF required for LOC only.

T Autopilot coupled approach NA. For inop ALS, increase S-LOC 5 Cats C and D visibility to RVR 5500.

MALSR

MISSED APPROACH: Climb to 3000 direct TRAVA and hold

D-ATIS 135.35	BUFFALO APP CON 126.15 263.125	BUFFALO TOWER 120.5 257.8	GND CON 133.2 257.8	CLNC DEL 124.7 257.8	CPDLC
------------------	-----------------------------------	------------------------------	------------------------	-------------------------	-------

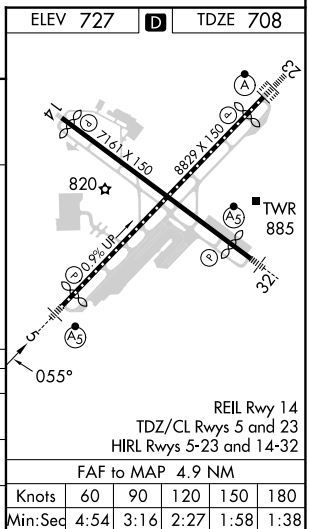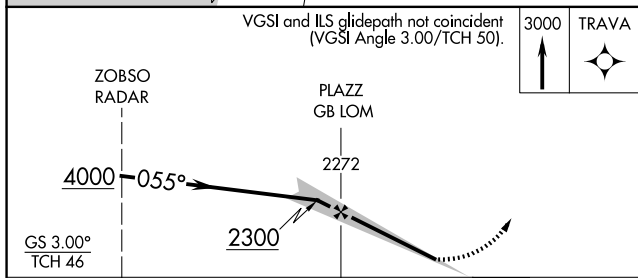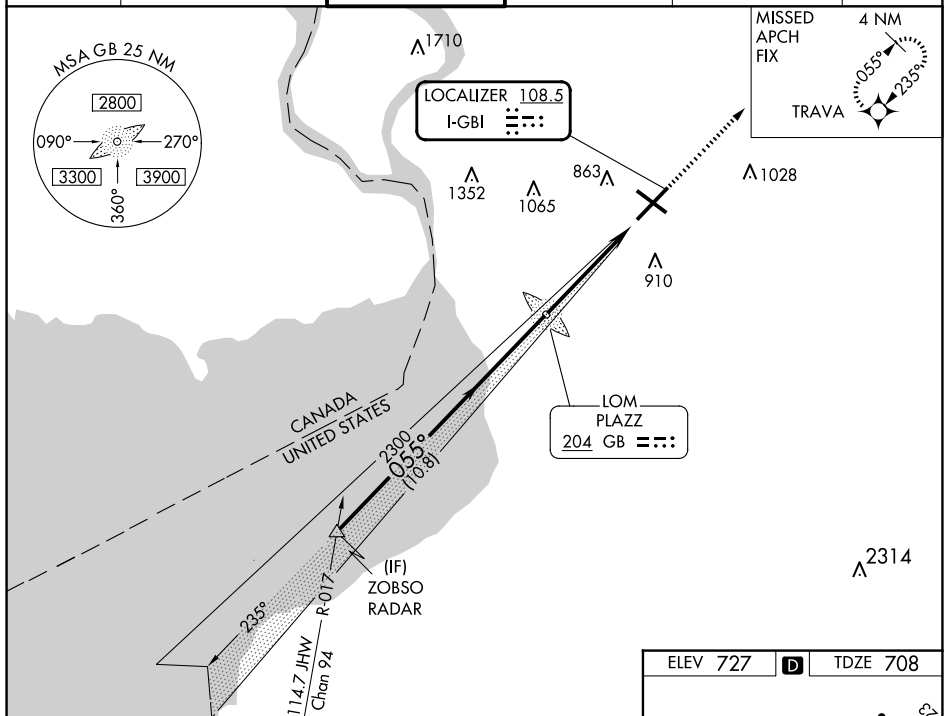

	10.8 NM		4.9 NM		
CATEGORY	A	B	C	D	
S-ILS 5	908/18 200 (200-½)				
S-LOC 5	1060/24 352 (400-½)		1060/30 352 (400-⅝)		
C CIRCLING	1200-1 473 (500-1)		1220-1½ 493 (500-1½)		1340-2 613 (700-2)