


WAAS CH 81811 W32A	APP CRS 318°	Rwy Idg TDZE Apt Elev 6121 713 727
--	------------------------	--

RNAV (GPS) RWY 32

BUFFALO NIAGARA INTL (BUF)

RNP APCH - GPS					MALSR		MISSED APPROACH:	
▼	For uncompensated Baro-VNAV systems LNAV/VNAV NA below -17°C or above 54°C. For inop ALS, increase LNAV/VNAV visibility all Cats to 1 SM. Inop table does not apply to LPV all Cats.							
D-ATIS	BUFFALO APP CON		BUFFALO TOWER		GND CON		CLNC DEL	CPDLC
135.35	126.15 263.125		120.5 257.8		133.2 257.8		124.7 257.8	

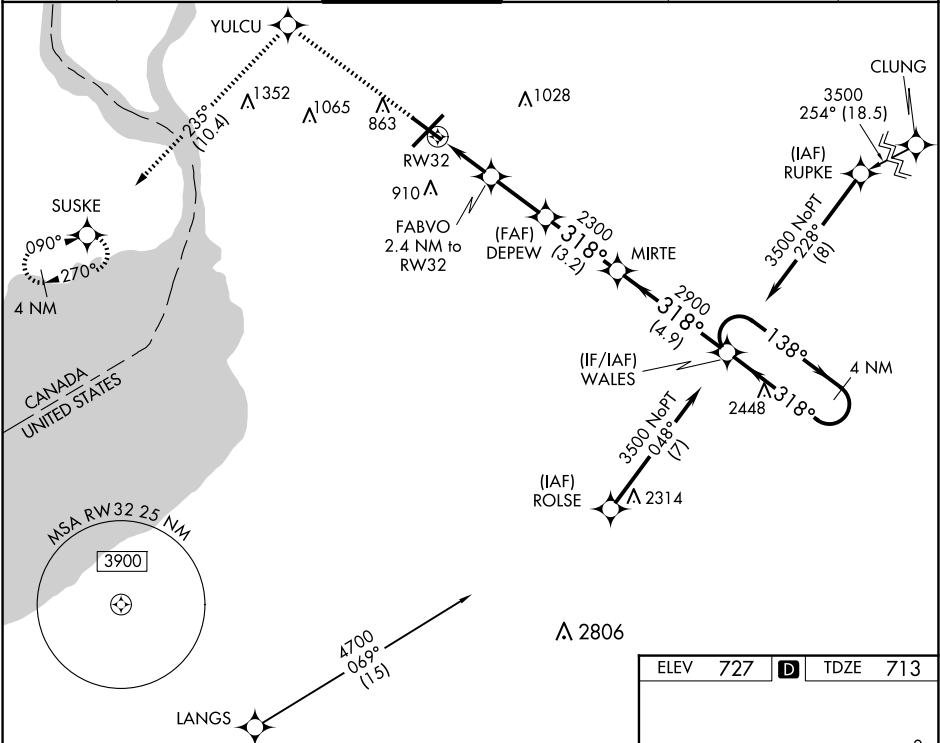

3000	YULCU	tr 235°	SUSKE	4 NM Holding Pattern	
* LNAV only.					
FABVO 2.4 NM to RW32		DEPEW 2300	MIRTE 2900	WALES	3500
*1.2 NM to RW32		318°		138° → ← 318°	
RW32		1520		GP 3.00° TCH 54	
1.2 NM		1.2 NM		2.4 NM	
		3.2 NM		4.9 NM	
CATEGORY	A		B	C	D
LPV DA			913-1/2	200 (200-1/2)	
LNAV/ VNAV DA			1092-5/8	379 (400-5/8)	
LNAV MDA	1140-1/2 427 (500-1/2)		1140-3/4 427 (500-3/4)		
CIRCLING	1200-1 473 (500-1)		1220-1 1/2 493 (500-1 1/2)		1340-2 613 (700-2)

