


WAAS CH 70311 W05A	APP CRS 055°	Rwy Idg 7569 TDZE 708 Apt Elev 727
--	------------------------	---

RNAV (GPS) Y RWY 5
BUFFALO NIAGARA INTL (BUF')

RNP APCH - GPS For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C.			MALS R	MISSED APPROACH: Climb to 3000 direct TRAVA and hold.	
D-ATIS 135.35	BUFFALO APP CON 126.15 263.125	BUFFALO TOWER 120.5 257.8	GND CON 133.2 257.8	CLNC DEL 124.7 257.8	CPDLC

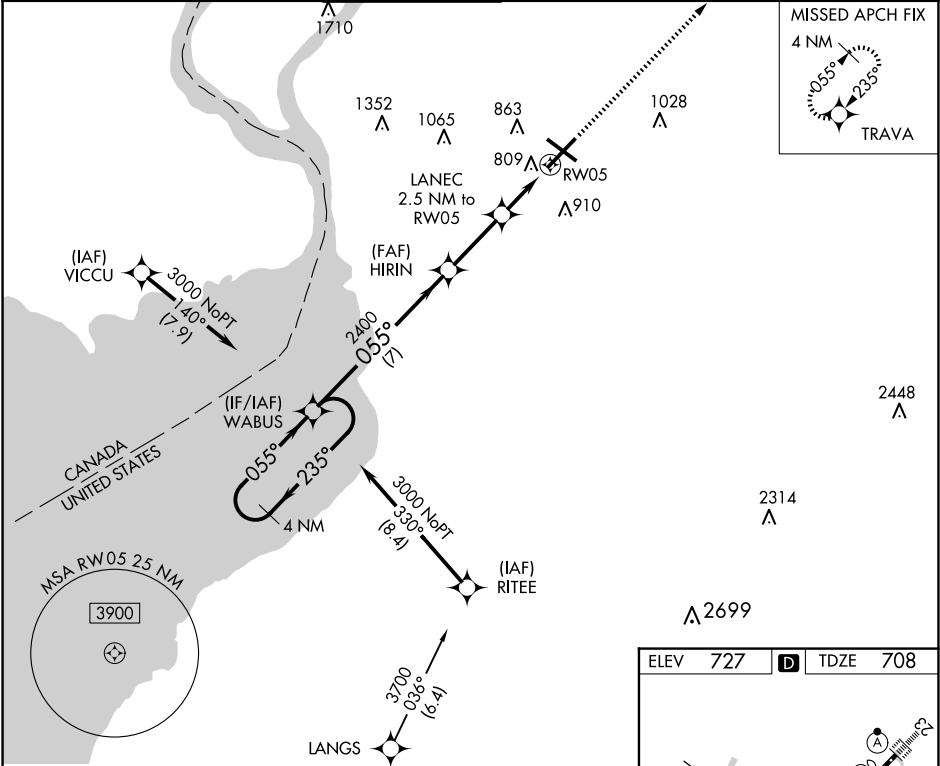

4 NM Holding Pattern		WABUS		HIRIN		LANEC 2.5 NM to RW05		3000 ↑		TRAVA ✦		
3000 ← 235° 055° →		055°		2400		*1.1 NM to RW05		*1.1 NM to RW05		* LNAV only		
GP 3.00° TCH 46		2400		*1520		RW05						
		7 NM		2.8 NM		1.4 NM		1.1 NM				
CATEGORY	A	B		C		D						
LPV DA	908/18		200 (200-½)									
LNAV/ VNAV DA	997/24		289 (300-½)									
LNAV MDA	1060/24	352 (400-½)	1060/35		352 (400-¾)							
CIRCLING	1200-1	473 (500-1)	1220-1½ 493 (500-½)		1340-2 613 (700-2)							

