


WAAS CH 58200 W12A	APP CRS 123°	Rwy Idg 10201 TDZE 1359 Apt Elev 1384
--	------------------------	--

RNAV (GPS) RWY 12C
MESA GATEWAY (IWA)


⚠ DME/DME RNP-0.3 NA. For uncompensated Baro-VNAV systems LNAV/VNAV NA below -17°C (2°F) or above 46°C (115°F).	MISSED APPROACH: Climb to 5000 direct PADPE and on 213° track to RIYCO and hold.
---	---

ATIS 133.5 270.275	PHOENIX APP CON 124.9 353.8	GATEWAY TOWER ★ 120.6 (CTAF) 289.4	GND CON 128.25 275.8	CLNC DEL 135.05
------------------------------	---------------------------------------	--	--------------------------------	---------------------------

Procedure NA for arrivals on PXR VORTAC
airway radials 321 CW 143.

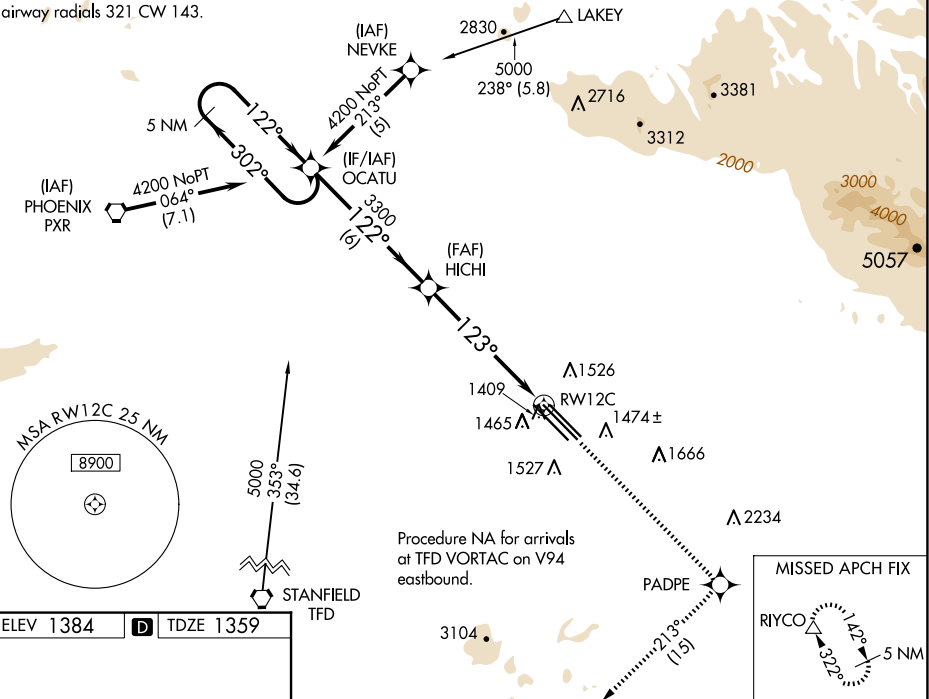

ELEV 1384	D	TDZE 1359
-----------	----------	-----------



MIRL Rwy 12R-30L
HIRL Rwy 12L-30R and 12C-30C
REIL Rwy 12L and 30R

5 NM Holding Pattern		OCATU	5000	PADPE	213° tr	RIYCO
4200 ← 302°		122° →	122°	3300	123°	3300
GP 3.00°		TCH 50	*1.1 NM to RWY 12C			
6 NM		4.8 NM	1.1	*LNAV only.		
CATEGORY	A	B	C	D	E	
LPV DA	1609-1 250 (300-1)					
LNAV/VNAV DA	1686-1¼ 327 (400-1¼)					
LNAV MDA	1740-1 381 (400-1)			1740-1¼ 381 (400-1¼)		
CIRCLING	1840-1¼	456 (500-1¼)	1880-1½	2000-2	2020-2¼	496 (500-1½) 616 (700-2) 636 (700-2¼)