

APP CRS	Rwy Ldg	9001
154°	TDZE	43
	Apt Elev	46

RNAV (RNP) Z RWY 15

CHARLESTON AFB/INTL (CHS)



⚠

For uncompensated Baro-VNAV systems, procedure NA below -5°C (23°F) or above 54°C (130°F). GPS required. For inop ALSF, increase RNP 0.11 all Cats visibility to RVR 4500 and RNP 0.30 all Cats visibility to RVR 6000.

ALSF-2

MISSED APPROACH: Climb to 3000 on track 154° to SHRMP and hold.

D-ATIS	CHARLESTON APP CON	CHARLESTON TOWER	GND CON	CLNC DEL	CPDLC
124.75	120.7 306.925	126.0 239.0	121.9 348.6	127.325 291.65	

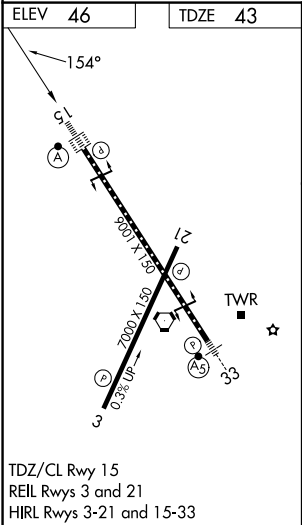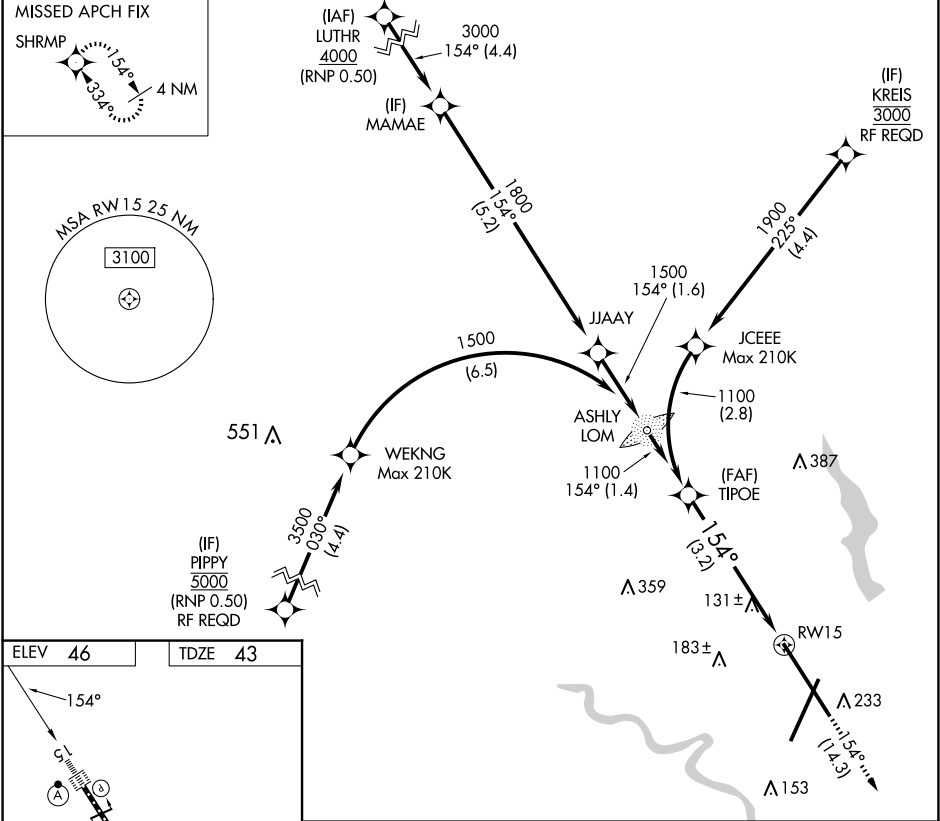

TIPOE		See planview for multiple IF locations.		3000	tr 154°	SHRMP
1100		154°		RW15		
GP 3.00° TCH 50		3.2 NM				
CATEGORY	A	B	C	D		
RNP 0.11 DA		315/24	272 (300-½)			
RNP 0.30 DA		428/45	385 (400-¾)			
AUTHORIZATION REQUIRED						