
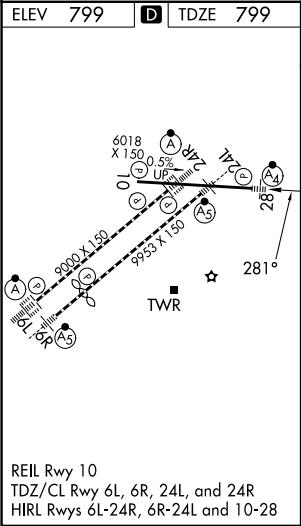


WAAS CH 40109 W28A	APP CRS 281°	Rwy Ldg 6018 TDZE 799 Apt Elev 799
--	------------------------	---

RNAV (GPS) RWY 28
CLEVELAND-HOPKINS INTL (CLE)

RNP APCH.		MALSF 	MISSED APPROACH: Climb to 1400 then climbing left turn to 3000 direct DJB VOR/DME and hold.
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). Circling Rwy 10 NA at night. Inop table does not apply to LPV.			
D-ATIS 127.85	CLEVELAND APP CON 126.55 346.325	CLEVELAND TOWER 124.5 273.45	GND CON 121.7 273.45

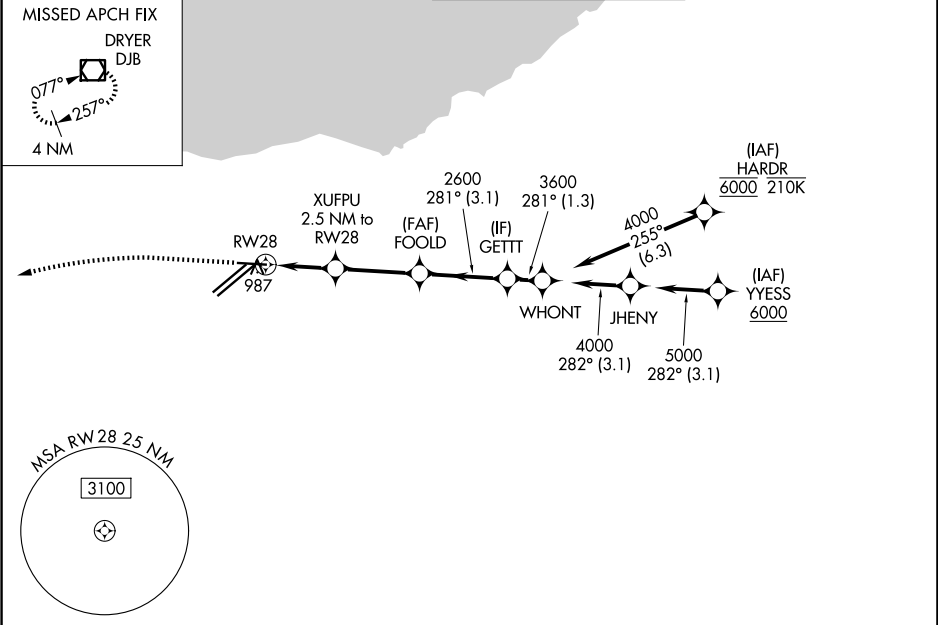

1400	3000	DJB		
*LNAV only.				
CATEGORY	A	B	C	D
LPV DA	999/40 200 (200-¾)			
LNAV/VNAV DA	1168/40 369 (400-¾)			
LNAV MDA	1260/40	461 (500-¾)	1260/60	461 (500-1¼)
CIRCLING	1420-1	621 (700-1)	1420-1¾ 621 (700-1¾)	1420-2 621 (700-2)