

LOC I-GJC 108.95	APP CRS 052°	Rwy Ldg TDZE Apt Elev	7001 228 236
----------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 5


COLUMBIA METRO (CAE)

RADAR required for procedure entry.

⚠ For inop ALS, increase S-ILS 5 Cat E visibility to RVR 4000, increase S-LOC 5 Cats C/D/E visibility to 2 SM and increase IKUPY minimums S-LOC 5 Cats C/D/E visibility to RVR 5500.
*RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR
AS
MISSED APPROACH: Climb to 1500 then climbing right turn to 2300 direct CAE VORTAC and hold, continue climb-in-hold to 2300. (TACAN aircraft continue on CAE VORTAC R-140 to ADCOM INT/CAE VORTAC 10 DME and hold NW, right turn, 140° inbound).

ATIS 120.15	COLUMBIA APP CON 124.15 338.2 (110°-289°) 133.4 285.6 (290°-109°)	COLUMBIA TOWER 119.5 257.8	GND CON 121.9 348.6
-----------------------	---	--------------------------------------	-------------------------------

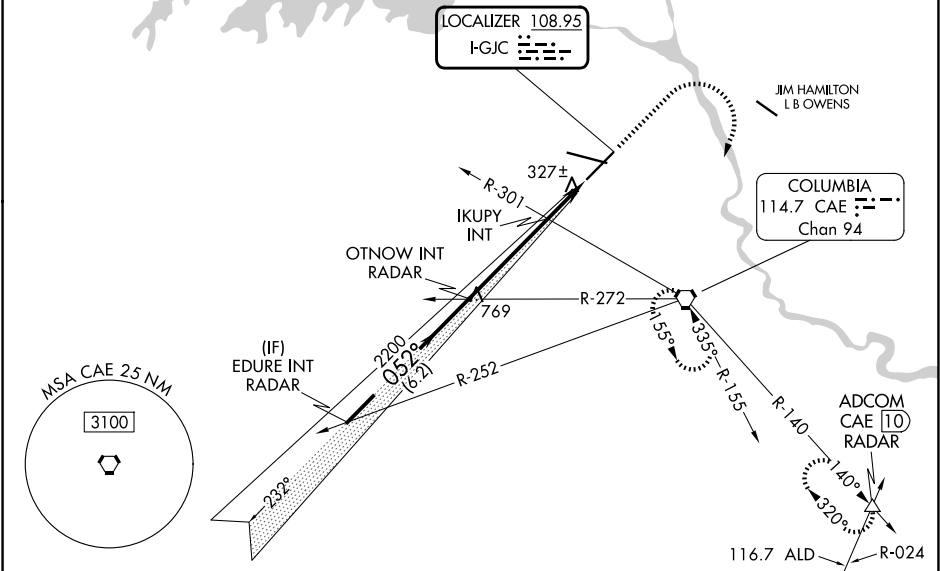

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 73).					1500	2300	CAE	ELEV 236	TDZE 228
EDURE/INT RADAR		OTNOW/INT RADAR							
2200		2200							
GS 3.00° TCH 60		960							
6.2 NM		3.9 NM			2.1 NM				
CATEGORY	A	B	C	D	E				
S-ILS 5*	428/24				200 (200-½)				
S-LOC 5	960/24	732 (800-½)	960-1½		732 (800-1½)				
CIRCLING	960-1	724 (800-1)	1040-2¼ 804 (900-2¼)	1040-2½ 804 (900-2½)	1040-2¾ 804 (900-2¾)				
IKUPY FIX MINIMUMS (DUAL VOR RECEIVER REQUIRED)									
S-LOC 5	580/24	352 (400-½)	580/30		352 (400-¾)				
CIRCLING	740-1 504 (600-1)	860-1 624 (700-1)	1040-2¼ 804 (900-2¼)	1040-2½ 804 (900-2½)	1040-2¾ 804 (900-2¾)				
REIL Rwy 23 TDZ/CL Rwy 11 HIRL Rlys 5-23 and 11-29									
FAF to MAP 6 NM									
Knots					60	90	120	150	180
Min:Sec					6:00	4:00	3:00	2:24	2:00