



WAAS CH 53414 W29A	APP CRS 292°	Rwy Ldg TDZE 227 Apt Elev 236
--	------------------------	---

RNAV (GPS) RWY 29

COLUMBIA METRO (CAE)

RNP APCH - GPS.	MALSR	MISSED APPROACH: Climb to 3000 direct BAPNE and hold.
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500 and LNAV Cats C and D to 1½ SM. * RVR 1800 authorized with use of FD or AP or HUD to DA.		

ATIS 120.15	COLUMBIA APP CON 124.15 338.2 (110°-289°) 133.4 285.6 (290°-109°)	COLUMBIA TOWER 119.5 257.8	GND CON 121.9 348.6
-----------------------	---	--------------------------------------	-------------------------------

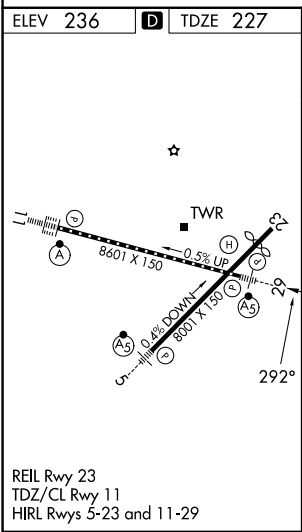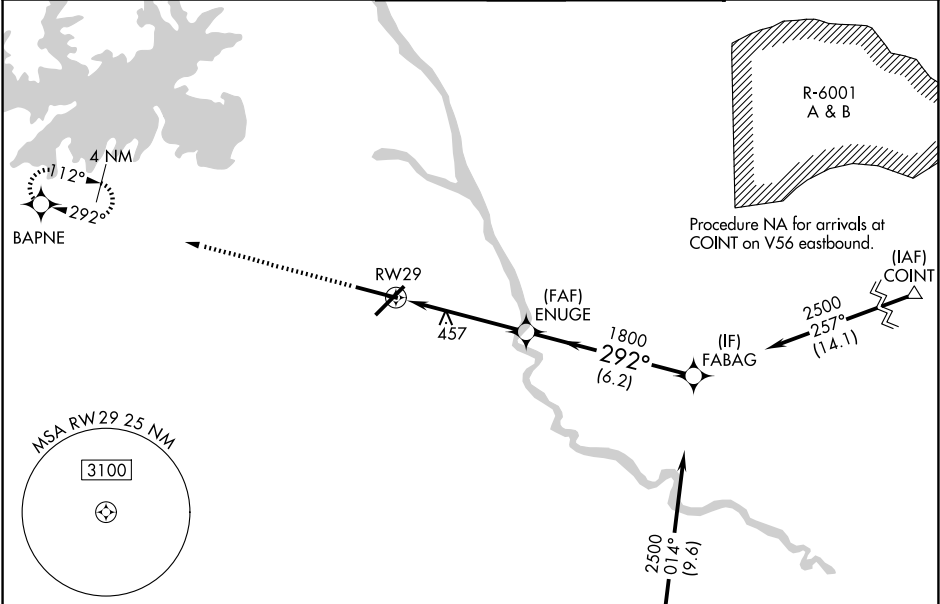

Procedure NA for arrivals at ADCOM on V53 and T441 southeast bound.			
(IAF) ADCOM			
3000 BAPNE			
RWY 29			
1.4 NM to RWY 29			
ENUGE			
1800			
292°			
2500			
GP 3.00° TCH 58			
1.4 NM 3.4 NM 6.2 NM			
CATEGORY	A	B	C
LPV DA*	427/24 200 (200-½)		
LNAV/VNAV DA	544/24 317 (400-½)		
LNAV MDA	720/24 493 (500-½)		
CIRCLING	740-1 504 (600-1)	860-1 624 (700-1)	1040-2¼ 804 (900-2¼)
			544/40 317 (400-¾)
			720/50 493 (500-1)
			1040-2½ 804 (900-2½)