


WAAS CH 45526 W05A	APP CRS 052°	Rwy Ldg TDZE Apt Elev	7001 228 236
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 5
COLUMBIA METRO (CAE)

RNP APCH - GPS		MALSR 	MISSED APPROACH: Climb to 2400 direct POMIE and on track 018° to BEFTY and hold.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 6000 and LNAV Cats C and D visibility to 1½ SM. *RVR 1800 authorized with use of FD or AP or HUD to DA.			

ATIS 120.15	COLUMBIA APP CON 124.15 338.2 (110°-289°) 133.4 285.6 (290°-109°)	COLUMBIA TOWER 119.5 257.8	GND CON 121.9 348.6
-----------------------	---	--------------------------------------	-------------------------------

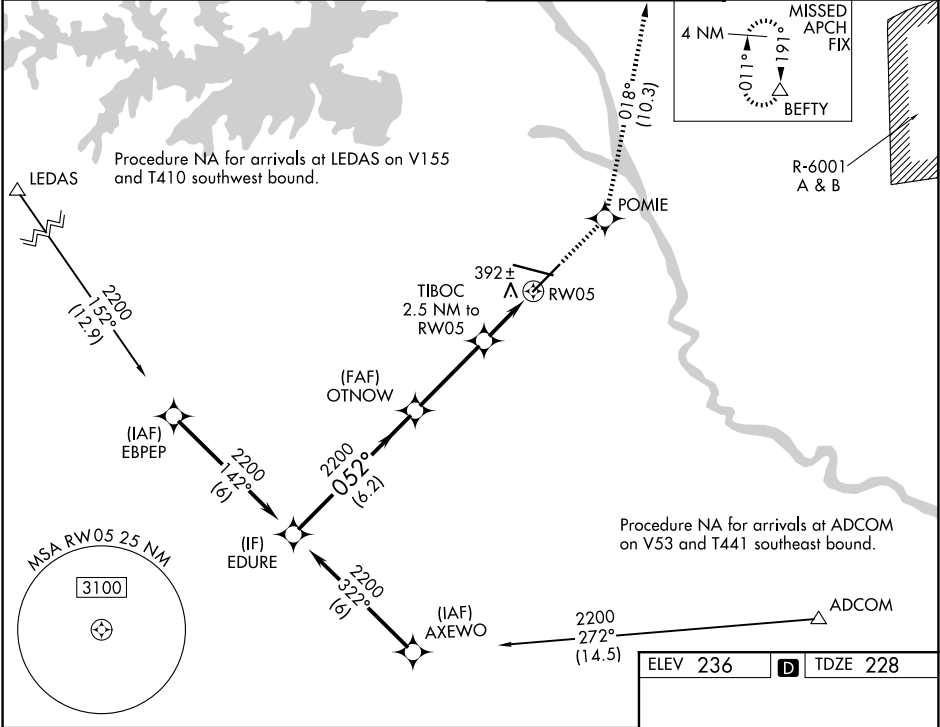

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 73).		2400	POMIE	BEFTY
EDURE		OTNOW	TIBOC 2.5 NM to RW05	tr 018°
2200		2200	1080	
GP 3.00° TCH 60		6.2 NM	3.5 NM	1.2 NM
CATEGORY	A	B	C	D
LPV DA*	428/24		200 (200-½)	
LNAV/VNAV DA	638/40		410 (500-¾)	
LNAV MDA	700/24		472 (500-½)	
CIRCLING	740-1 504 (600-1)	860-1 624 (700-1)	1040-2¼ 804 (900-2¼)	1040-2½ 804 (900-2½)

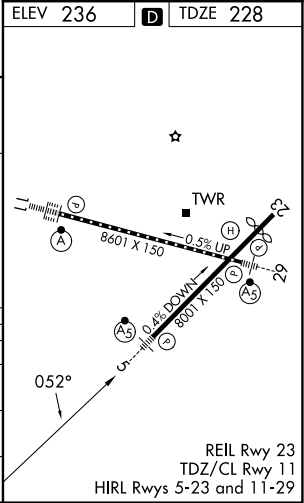

SE-2, 02 OCT 2025 to 30 OCT 2025

SE-2, 02 OCT 2025 to 30 OCT 2025