


RNAV (GPS) RWY 13L

APCH CRS	Rwy Idg	5002
132°	TDZE	18
	Arpt Elev	18

[USN]


CORPUS CHRISTI NAS (TRUAX FLD) (KNGP)

RNP APCH		MISSED APPROACH: Climb to 600, then climbing right turn to 1600 direct POLCK and hold.	
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15° C (5° F) or above 54° C (129° F).			
ATIS ★	APP CON	NAVY CORPUS TOWER ★	GND CON
127.9 290.9	128.675 343.75	134.85 340.2	118.7 257.85
			CLNC DEL
			314.3
			ASR/ PAR

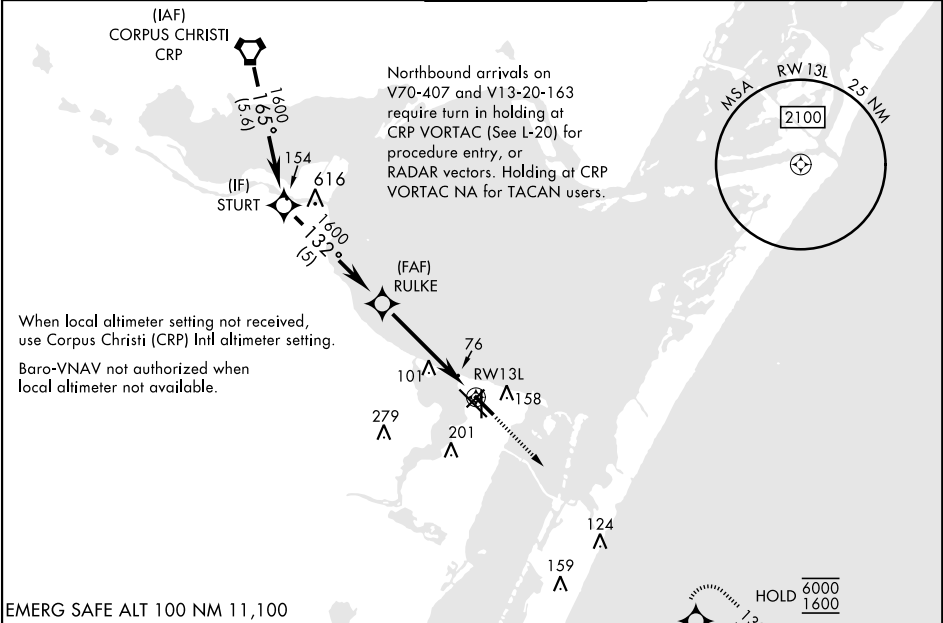

EMERG SAFE ALT 100 NM 11,100

VDP not authorized when using Corpus Christi (CRP) Intl altimeter setting.				
600 1600 POLCK				
CRP VORTAC STURT RULKE 1.1 NM to RW13L 4.8 NM RW13L				
GP 3.00° TCH 46				
CATEGORY	A	B	C	D
LNAV/VNAV DA	268-1		250 (300-1)	
LNAV MDA	400-1 382 (400-1)		400-1½ 382 (400-1½)	
CIRCLING	440-1 442 (500-1)	480-1 462 (500-1)	520-1½ 502 (600-1½)	580-2 562 (600-2)
CORPUS CHRISTI (CRP) INTL ALTIMETER SETTING				
LNAV MDA	420-1 402 (500-1)		420-1½ 402 (500-1½)	
CIRCLING	500-1 482 (500-1)		540-1½ 522 (600-1½)	
			620-2 602 (700-2)	

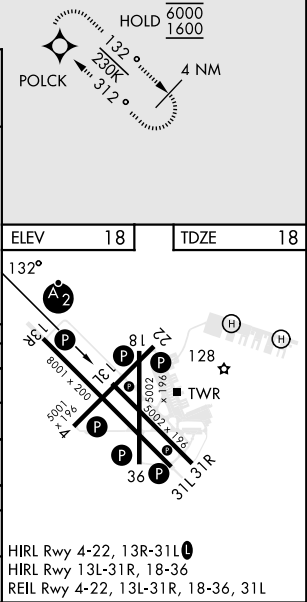

RNAV (GPS) RWY 13L

SC-3, 02 OCT 2025 to 30 OCT 2025

SC-3, 02 OCT 2025 to 30 OCT 2025