


RNAV (GPS) RWY 18

APCH CRS	Rwy Idg	5002
177°	TDZE	18
	Arpt Elev	18


[USN]

CORPUS CHRISTI NAS (TRUAX FLD) (KNGP)

RNP APCH			MISSED APPROACH: Climb to 2000 direct TYSON and hold.		
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15° C (5° F) or above 54° C (129° F).					
ATIS ★ 127.9 290.9	APP CON 128.675 343.75	NAVY CORPUS TOWER ★ 134.85 0 340.2	GND CON 118.7 257.85	CLNC DEL 314.3	ASR/ PAR

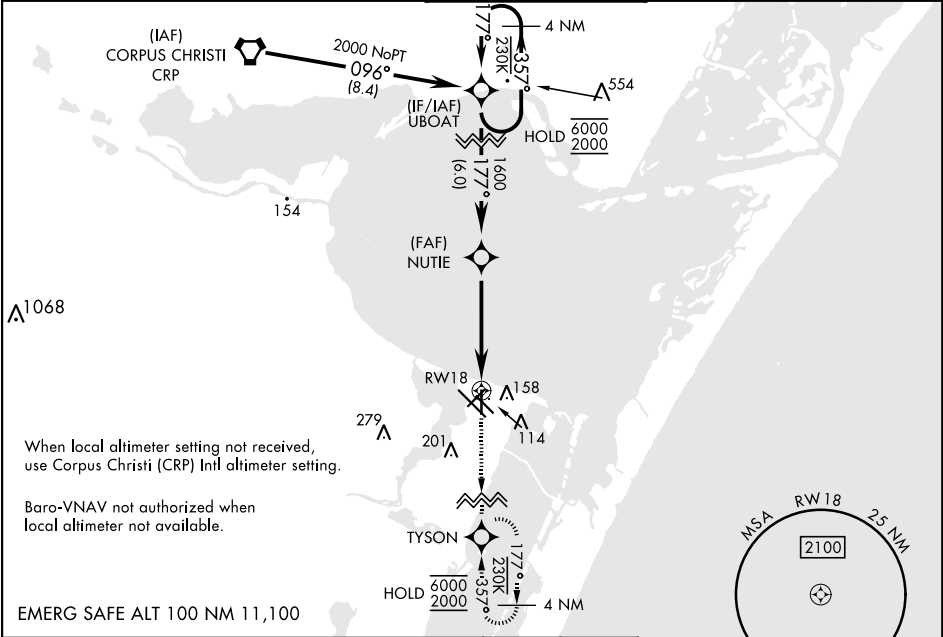

VDP not authorized when using Corpus Christi (CRP) Intl altimeter setting.				
4 NM Holding Pattern				
UBOAT				
GP 3.00° TCH 50				
CATEGORY	A	B	C	D
LNAV/VNAV DA	268-¾	250	(300-¾)	275-¾ 257 (300-¾)
LNAV MDA	380-1		362	(400-1)
CIRCLING	460-1 442 (500-1)	480-1 462 (500-1)	520-1½ 502 (600-1½)	580-2 562 (600-2)
CORPUS CHRISTI (CRP) INTL ALTIMETER SETTING				
LNAV MDA	400-1	382 (400-1)	400-1½	382 (400-1½)
CIRCLING	500-1	482 (500-1)	540-1½ 522 (600-1½)	620-2 602 (700-2)

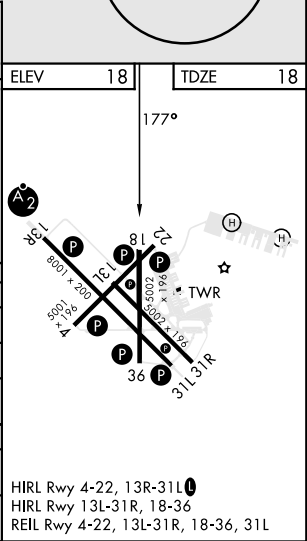

RNAV (GPS) RWY 18

SC-3, 02 OCT 2025 to 30 OCT 2025

SC-3, 02 OCT 2025 to 30 OCT 2025