


EMMTT FOUR DEPARTURE (RNAV)

EMMTT4.EMMTT) 31MAR16

LOVE STAR DEP CON
118.55 290.35
D-ATIS
120.15
CINC DEL
127.9
CPDC
GND CON
121.75 348.6
LOVE TOWER
123.7 239.3

NOTE: RADAR required.
NOTE: DME/DME/IRU or GPS required.
NOTE: RNAV 1.
NOTE: For use by turbojet aircraft only.
NOTE: RNAV-Capable Props: File and expect KUSSO RNAV SID.
NOTE: BDDAY Transition: ATC assigned only.
NOTE: MRSSH Transition: For aircraft landing in Shreveport, Jackson and Monroe terminal area airports only.

TOP ALTITUDE:
RWY 13L/R: 3000
RWY 31L/R: 6000

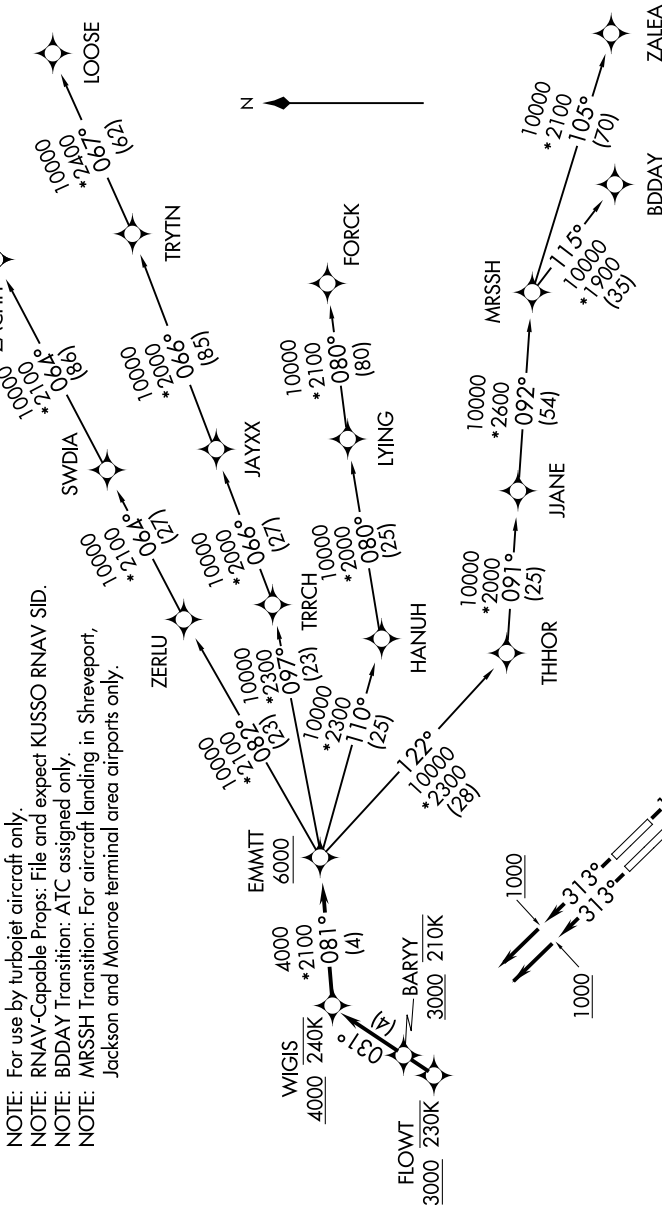

TAKEOFF MINIMUMS
Rwys 13L/R: Standard with minimum climb of 500' per NM to 1200.
Rwys 31L/R: Standard with minimum climb of 500' per NM to 1000.

(CONTINUED ON FOLLOWING PAGE)

NOTE: Chart not to scale.