

APP CRS
133°

Rwy Idg
8310

TDZE
478

Apt Elev
487

RNAV (RNP) W RWY 13R


DALLAS LOVE FLD (DAL.)

▼

For uncompensated Baro-VNAV systems, procedure NA below -5°C (23°F) or above 54°C (130°F). Simultaneous approach authorized. RF required. GPS required. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

MISSED APPROACH: Climb to 3000 direct ENAVE and on track 151° to TACKE and hold.

D-ATIS 120.15	LONE STAR APP CON NORTH 124.3 282.275 SOUTH 125.2 343.65	LOVE TOWER 123.7 239.3	GND CON 121.75 348.6	CLNC DEL 127.9	CPDLC
------------------	--	---------------------------	-------------------------	-------------------	-------

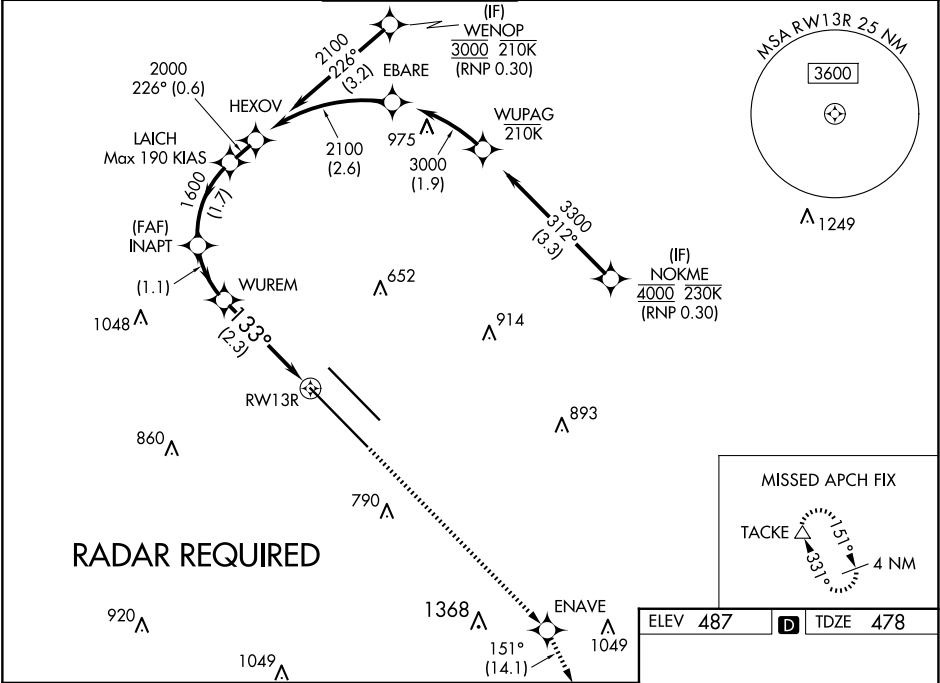

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 52).

3000 ENAVE tr 151° TACKE

See planview for multiple IF locations.

HEXOV 2100 226°
LAICH 2000
INAPT 1600
WUREM 1250
RW13R 1600 133°

GP 3.00°
TCH 48

0.6 NM 1.7 NM 1.1 NM 2.3 NM

CATEGORY	A	B	C	D
RNP 0.20 DA		781/50	303 (300-1)	
RNP 0.25 DA		833/60	355 (400-1¼)	
RNP 0.30 DA		929-1½	451 (500-1½)	

AUTHORIZATION REQUIRED

ELEV 487 TDZE 478

TDZ/CL Rwy 13L and 31L
HIRL Rwy 13L-31R, and 13R-31L