

LOC I-ELM <u>109.1</u>	APP CRS 242°	Rwy Ldg 7799 TDZE 955 Apt Elev 955
----------------------------------	------------------------	---

ILS or LOC RWY 24
ELMIRA/CORNING RGNL (ELM)

RADAR required to define ERINN. RNAV 1-GPS required from MAP to UNOLY.
RNAV-1 GPS required for procedure entry. ADF or RADAR required.

MALSR



MISSED APPROACH:
Climb to 4000 direct
UNOLY/RADAR and hold.
** Missed approach
requires minimum
climb of 260 feet
per NM to 2400.

T Circling NA for Cat D south of Rwy 10 and 28. Inop table does not apply to
A S-LOC 24 Cats C/D. Circling NA to Rwy 5 and 23. Circling Rwy 10 NA at night.
0100 For inop ALS increase S-LSL 24 all Cats visibility to RVR 6000.

 -21°C

** S-ILS 24 RVR 1800 authorized with use of FD or AP or HUD to DA.

ATIS 125.475	ELMIRA APP CON ★ 128.425 257.8	ELMIRA TOWER ★ 121.1 (CTAF) 0 257.8	GND CON 121.9	CLNC DEL 121.9	UNICOM 122.95
------------------------	--	---	-------------------------	--------------------------	-------------------------

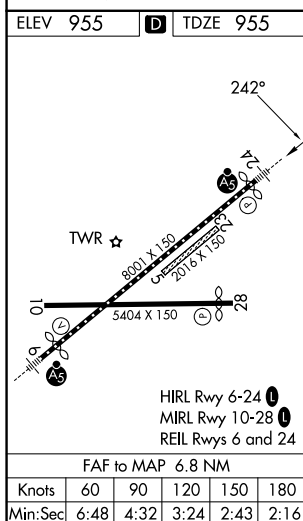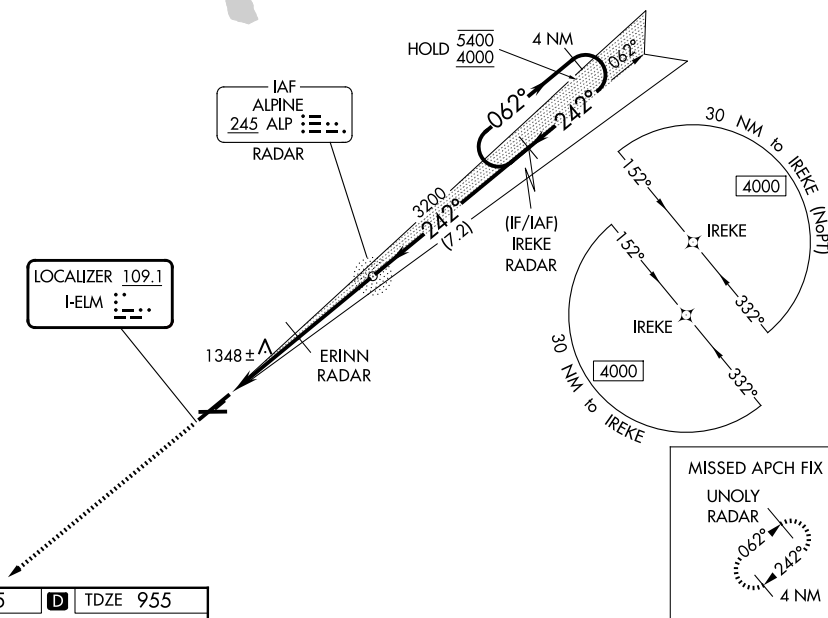

4000
↑
UNOLY RADAR

*LOC only.

ERINN RADAR

ALP NDB RADAR

IREKE RADAR

4 NM Holding Pattern

3158

062° → 5400
← 242° 4000

2060*

242°

3200

3.3 NM

3.5 NM

7.2 NM

GS 3.00°
TCH 53

CATEGORY	A	B	C	D
S-ILS 24 **	1155/24 200 (200-½)			
S-ILS 24	1340/35 385 (400-¾)			
S-LOC 24	2060/40 1105 (1200-¾)	2060/55 1105 (1200-1)	2060-3	1105 (1200-3)
CIRCLING	2060-1¼ 1105 (1200-1¼)	2080-1½ 1125 (1200-1½)	2100-3 1145 (1200-3)	2340-3 1385 (1400-3)
ERINN FIX MINIMUMS				
S-LOC 24	1600/24	645 (700-½)	1600-1⅜	645 (700-1⅜)
CIRCLING	2020-1¼ 1065 (1100-1¼)	2080-1½ 1125 (1200-1½)	2100-3 1145 (1200-3)	2340-3 1385 (1400-3)