

APP CRS
265°

Rwy Ldg
TDZE
Apt Elev

9025
3962
3962

RNAV (RNP) Z RWY 26L

EL PASO INTL (ELP)


ASR

For uncompensated Baro-VNAV systems, procedure NA below -8°C (18°F) or above 50°C (122°F). For inop MALS, increase RNP 0.30 visibility all Cats to 1 mile. GPS Required.

MALS

MISSED APPROACH: Climb to 4400, then climbing right turn to 7500 direct FABAN and hold.

D-ATIS	EL PASO APP CON	EL PASO TOWER	GND CON	CLNC DEL
120.0 254.3	124.25 298.85	118.3 239.275	121.9 348.6	125.0 379.1

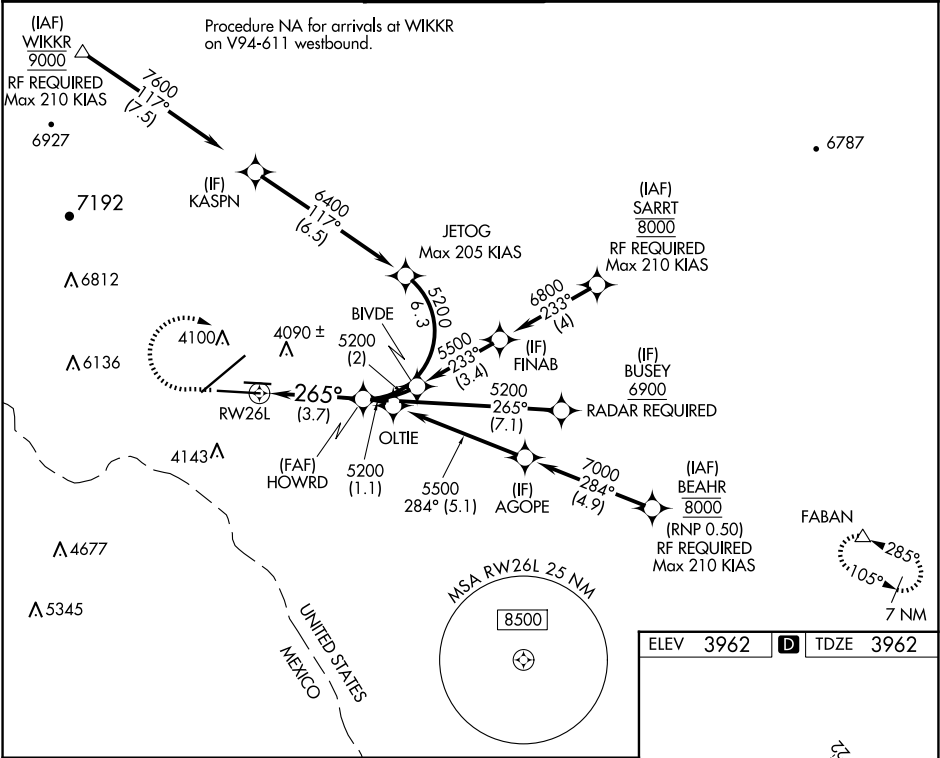

4400

7500

FABAN

VGSI and glidepath not coincident (VGSI Angle 3.00/TCH 75).

See planview for multiple IF locations.

RWY 26L

265°

5200

GP 3.00°

TCH 55

3.7 NM

CATEGORY	A	B	C	D
RNP 0.30 DA	4275-½	313 (400-½)		

AUTHORIZATION REQUIRED

ELEV 3962

TDZE 3962

12620 X 150

5499 X 75

9025 X 150

0.5% UP

0.3% DOWN

TWR

26L

265°

MIRL Rwy 8L-26R
REIL Rwy 4 and 8R
HIRL Rwy 4-22 and 8R-26L