


VORTAC END 115.4 Chgn 101	APCH CRS 196°	Rwy Idg 5024 TDZE 1282 Arpt Elev 1307
---	-------------------------	--


AL-135 [USAF]

VANCE AFB (KEND)




ATIS ★	APP CON	TOWER ★	GND CON	CLNC DEL
115.4 263.15	125.45 388.2 EAST 126.75 346.325 WEST	124.05 259.1	121.675 289.4	225.4

FOR USE BY 71 FTW
ACFT ONLY

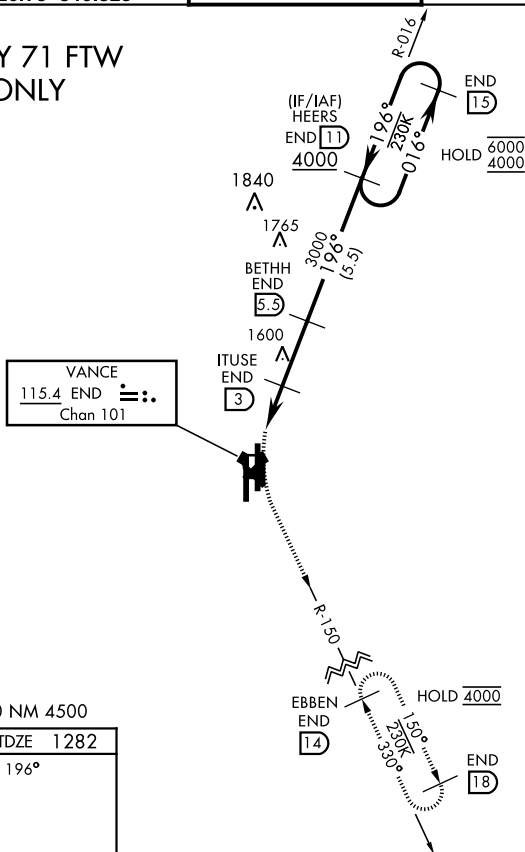

EMERG SAFE ALT 100 NM 4500

ELEV 1307		TDZE 1282
-----------	--	-----------

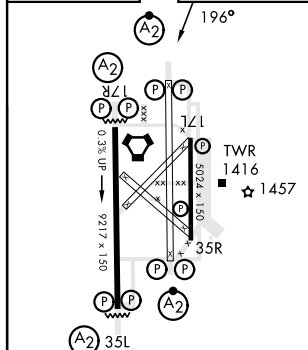

HIRL Rwy 17C-35C, 17R-35L
MIRL Rwy 17L-35R
REIL Rwy 17L-35R

Diagram illustrating a step climb profile. The climb is divided into segments with specific distances and angles. The first segment is 1.5 NM at 3.02° TCH 40, reaching 2200 ft. The second segment is 3 NM, reaching 3000 ft. The third segment is 5.3 NM, reaching 4000 ft. The fourth segment is 11 NM, reaching 6000 ft. The total distance is 15 NM. The diagram also shows the VGS and descent angles not coincident (VGS Angle 3.00/TCH 54).

CATEGORY	A	B	C	D
S-17L	1720-1½	438 (500-1½)		NA
C CIRCLING	1760-1½	453 (500-1½)		NA

ENID, OKLAHOMA

36°20'N-97°55'W

VANCE AFB (KEND)

Orig 24MAR22

VOR/DME RWY 17L