


VOR/DME FREQ 116.2 Chan 109	APP CRS 360°	Rwy Ldg 9001 TDZE 899 Apt Elev 901
---	------------------------	---

VOR RWY 36
HECTOR INTL (FAR)

	For inop MALSR, increase S-36 Cat E visibility to 2½ miles. STABS Fix Minimums: For inop MALSR, increase S-36 Cat E visibility to 1¾ mile.	MALSR 	MISSED APPROACH: Climbing left turn to 3500 direct FAR VOR/DME and hold.
---	---	--	---

ATIS 124.5 379.2	FARGO APP CON 120.4 377.15	FARGO TOWER 133.8 290.4	GND CON 121.9 348.6
----------------------------	--------------------------------------	-----------------------------------	-------------------------------

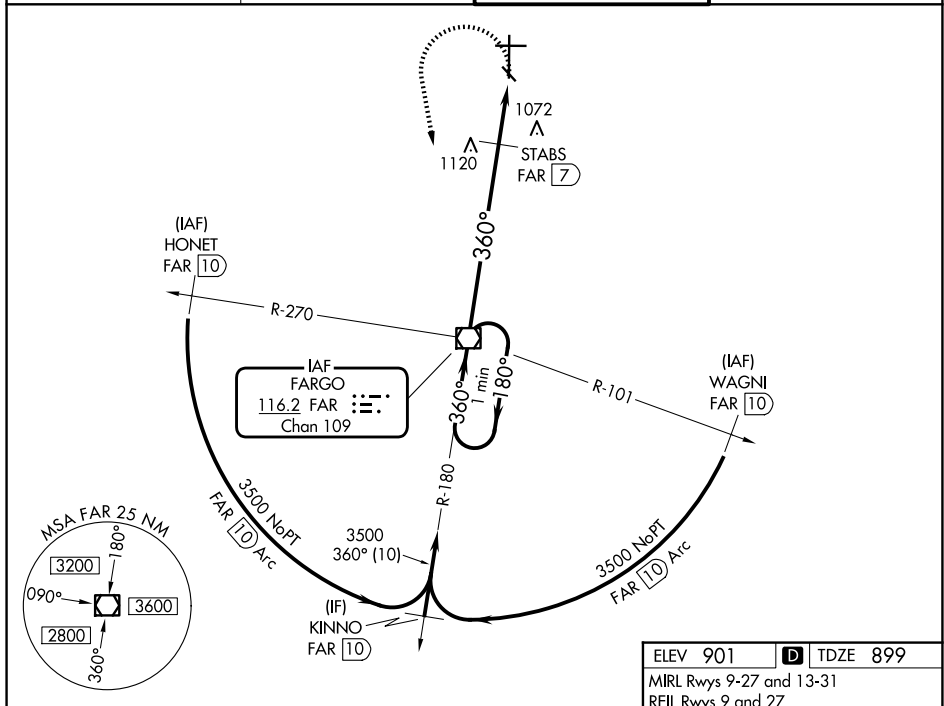

One Minute Holding Pattern

3500

180°

360°

FAR VOR/DME

360°

1600

STABS FAR 7

FAR 8.1

FAR 9.4

7 NM

1.1 NM

1.3 NM

3500

FAR

