

WAAS CH 61310 W27A	APP CRS 273°	Rwy Ldg TDZE 139 Apt Elev 147
--	------------------------	---

RNAV (GPS) RWY 27

FLORENCE RGNL (FLO)


RNP APCH - GPS.

⚠

Circling Rwy 1, 19 NA at night.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C or above 54°C.

MISSED APPROACH: Climb to 2200 direct IMOVE and hold, continue climb-in-hold to 2200.

ATIS 123.625	FLORENCE APP CON★ 118.6 341.7 (256°-074°) 135.25 316.15 (075°-255°)	FLORENCE TOWER★ 125.1 (CTAF) 353.85	GND CON 121.9 353.85	UNICOM 122.95
------------------------	---	--	--------------------------------	-------------------------

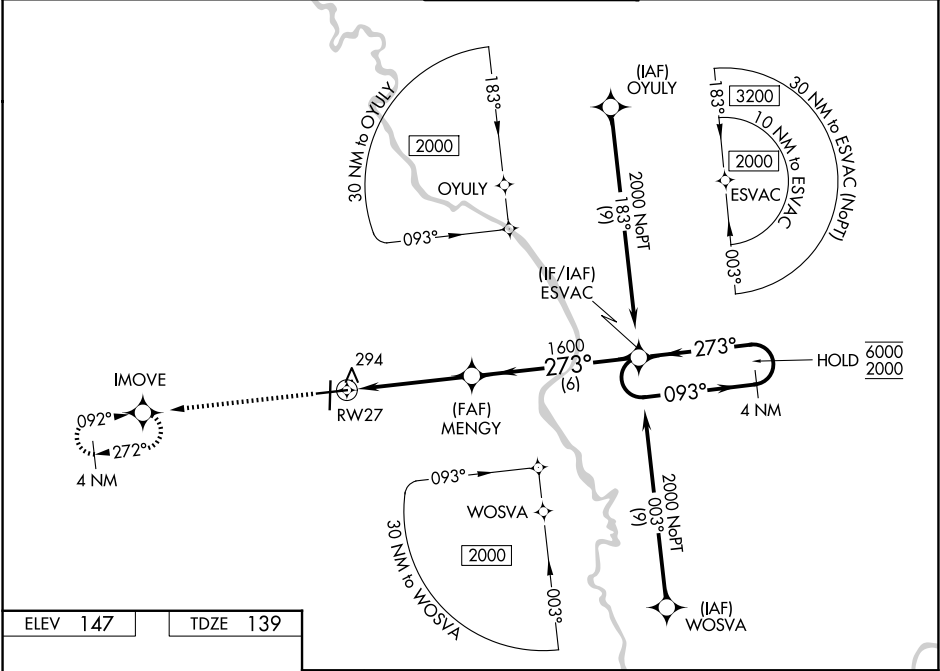

ELEV 147

TDZE 139

TWR 61

6502 X 150

6000 X 150

0.5% UP

0.4% UP

273°

MIRL Rwy 1-19

HIRL Rwy 9-27

REIL Rwy 1, 19 and 27

2200	IMOVE	ESVAC	4 NM Holding Pattern	
1.2 NM to RWY 27	MENGY 1600	273°	093° → 6000 ← 273° 2000	
1.2 NM	3.3 NM	6 NM	GP 3.00° TCH 46	
CATEGORY	A	B	C	D
LPV DA		389-1	250 (300-1)	
LNAV/VNAV DA		465-1	326 (400-1)	
LNAV MDA	560-1	421 (500-1)	560-1¼	421 (500-1¼)
CIRCLING	640-1 493 (500-1)	660-1 513 (600-1)	900-2¼ 753 (800-2¼)	900-2½ 753 (800-2½)

SE-2, 02 OCT 2025 to 30 OCT 2025

SE-2, 02 OCT 2025 to 30 OCT 2025