

WAAS CH 65738 W23A	APP CRS 236°	Rwy Ldg TDZE Apt Elev	3035 834 836
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 23
SMITH FLD (SMD)


RNP APCH - GPS.




Rwy 23 helicopter visibility reduction below 1 SM NA. Circling to Rwy 13/31 NA at night. When local altimeter setting not received, use FWA altimeter setting and increase all MDAs 40 feet and LNAV visibility Cat C $\frac{1}{8}$ SM and LP visibility Cat C $\frac{1}{8}$ SM.

MISSED APPROACH: Climb to 2700 direct JISUD and on track 294° to WERBU and hold.

AWOS-3 124.55	FORT WAYNE APP CON 127.2 284.6	UNICOM 122.8 (CTAF) 0
-------------------------	--	---------------------------------

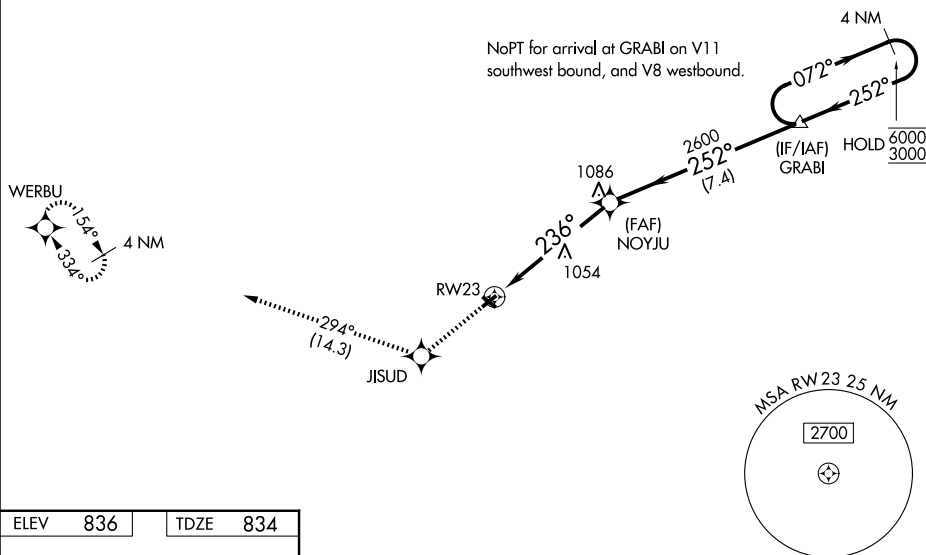

ELEV	836		TDZE	834
------	-----	--	------	-----

MIRL Rwy 5-23 and 13-31 **L**

FORT WAYNE, INDIANA

Amdt 2 17APR25

41°09'N-85°09'W

SMITH FLD (SMD)

RNAV (GPS) RWY 23

EC-2, 02 OCT 2025 to 30 OCT 2025

2700 ↑	JISUD ✱	tr 294°	WERBU ✱	Visual Segment - Obstacles.	4 NM Holding Pattern	
RW23 NOYJU ✱ 2600 236° 252° 072° → 6000 ← 252° 3000 5.4 NM 7.4 NM GRAB1						
CATEGORY		A		B	C	D
LP	MDA	1360-1	526 (600-1)		1360-1½ 526 (600-1½)	NA
LNAV	MDA	1400-1	566 (600-1)		1400-1⅝ 566 (600-1⅝)	NA
CIRCLING		1400-1	564 (600-1)		1940-3 1104 (1200-3)	NA